

## Modular Signal Towers / KombiSIGN 72

### TwinLIGHT Classic 24VAC/DC BU



|           |              |
|-----------|--------------|
| Part No.: | 647.510.75   |
| Series:   | KombiSIGN 72 |



#### MECHANICAL DATA

|                             |                  |
|-----------------------------|------------------|
| Height                      | 66 mm            |
| Diameter                    | 70 mm            |
| Materials                   | PC               |
| Dome colour                 | Blue             |
| Protection category         | IP65             |
| Service life optical        | 50,000 h maximum |
| Working temperature minimum | -30°C            |
| Working temperature maximum | +60°C            |
| UL Type Rating              | Type 12          |
| Weight with packaging       | 91 g             |
| Product weight              | 77 g             |

#### ELECTRICAL DATA

|                             |                    |
|-----------------------------|--------------------|
| Operating voltage           | 24V                |
| Operating voltage type      | AC/DC              |
| Operating voltage frequency | 50Hz               |
| Operating voltage tolerance | +/- 10%            |
| Rated operational voltage   | 24 VDC             |
| Rated operational current   | 80 mA              |
| Rated inrush current        | 500 mA             |
| Protection class            | Protection class 2 |
| Pollution degree            | 3                  |

#### OPTICAL DATA


|                      |                                 |
|----------------------|---------------------------------|
| Light source         | LED                             |
| Light colour         | Blue                            |
| Optical signal image | Blink<br>Permanent<br>TwinLight |
| Blink frequency (Hz) | 1 Hz                            |



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

## Modular Signal Towers / KombiSIGN 72 **TwinLIGHT Classic 24VAC/DC BU**

### DRAWING

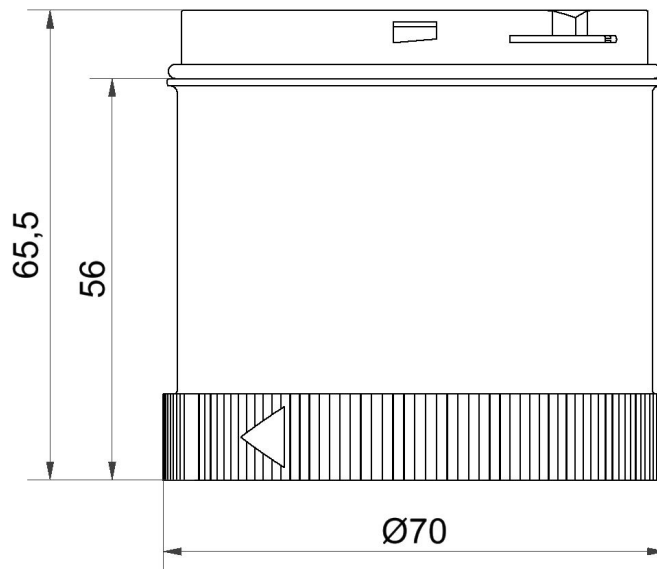

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.