


Completely pre-assembled Signal Towers / KOMPAKT 37

K37 cable EM Pulse tone 24VAC/DC GN/YE/R



Part No.:	699.110.75
Series:	Kompakt 37

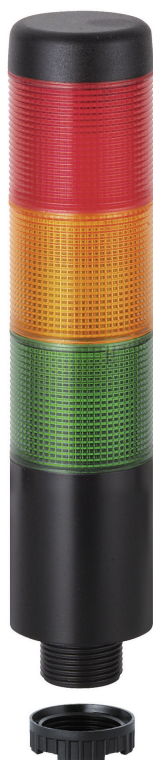

MECHANICAL DATA

Height	175 mm
Diameter	38 mm
Materials	PC
Dome colour	Green Red Yellow
Housing colour	Black
Protection category	IP65
Connection	Cable
cross-sectional area maximum	0,34mm ² / 22AWG
Cable entry	Membrane grommet
Cable entry minimum	d = 1 mm
Cable entry maximum	d = 9 mm
Cable length	2000 mm
Tension relief	Pull-out protection
Type of fixing	Built-in mounting
Service life optical	50,000 h maximum
Acoustic service life	5,000 h minimum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12 Type 4X
Weight with packaging	214 g
Product weight	178 g

ELECTRICAL DATA

Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	125 mA
Rated inrush current	500 mA
Protection class	Protection class 2
Pollution degree	3 In the connection area: 2

OPTICAL DATA

Light source	LED
--------------	-----



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

K37 cable EM Pulse tone 24VAC/DC GN/YE/R

ACUSTICAL DATA	
Volume/dB(max) at 1m distance	85,0 dB (A)
Acoustic signal image	Pulse tone
Audio frequency	2900 Hz

Technical drawing of five different sizes of a screw-on cap (Schraubkappe) for a 1000mm x 1000mm table. The drawing shows the side profile of the caps, which have a threaded section and a flange. Dimensions are given in millimeters. The top diameter is $\text{Ø}37,5$. The bottom diameter is $\text{Ø}27,7$. The height of the threaded section is 127,5. The total height of the cap is 229,5. The drawing also shows the cap being used to secure a table top with a 1000mm x 1000mm hole.

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.