

Product data

Product code	VC05-0235	STK-code	1912364	EAN-code	6410019123647
Product name	OTL-connector 3xAl/Cu 25-150mm ² (Grey)				
Wires	3xAl/Cu 25-150mm ²				

Technical data

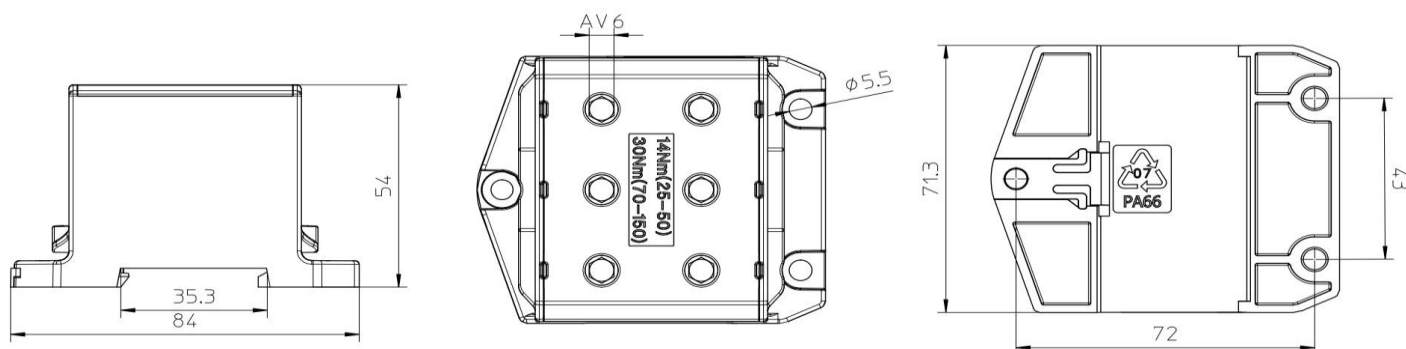
Nominal current	Cu	320	A
	Al	290	A
Nominal voltage		1000	V
Max. Current (US)	Cu	-	A
	Al	-	A
Max. Voltage (US)		-	V
Number of poles		1	pcs
Max. Cross section		150	mm ²
Tightening torque	25-50 mm ²	14	Nm
	70-150 mm ²	30	Nm
	-	-	Nm
	-	-	Nm
Max. Operating temperature		80	°C
Weight		246	g
IP-protection		IP20	



Standards	EN 61238-1; EN60947-7-1
Color/ Material	Grey RAL 7035/ PA66-V0
Mounting/ Connection	DIN-rail and screw (M5) mounting

Description

OTL-connectors are designed to be used connecting and branching aluminium and copper conductors. The body is made of tin plated aluminium.

Drawing

Package

Package	Box	Pcs / Package	6	Weight [kg]	1,58
Length [mm]	300	Width [mm]	205	Height [mm]	100

Ouneva Oy

Teollisuustie 21
 FI-82730 Tuupovaara
 Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi