

## Han-Modular coax F-contact 75Ohm (RG179)

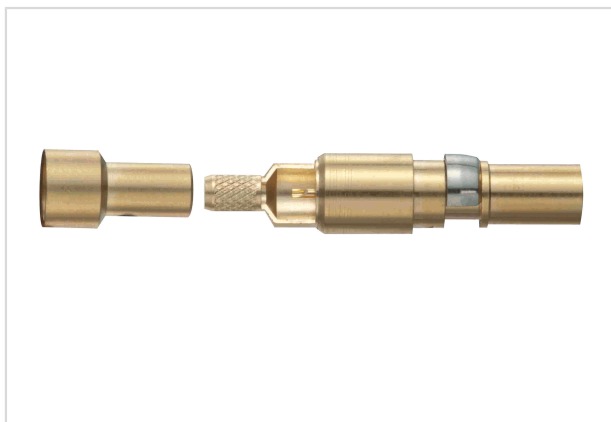


Image is for illustration purposes only. Please refer to product description.

|                    |                                                                                       |
|--------------------|---------------------------------------------------------------------------------------|
| Part number        | 09 14 000 6221                                                                        |
| Specification      | Han-Modular coax F-contact 75Ohm (RG179)                                              |
| HARTING eCatalogue | <a href="https://b2b.harting.com/09140006221">https://b2b.harting.com/09140006221</a> |

### Identification

|                            |                              |
|----------------------------|------------------------------|
| Category                   | Contacts                     |
| Series                     | DIN 41626                    |
| Type of contact            | Coaxial contact              |
| Description of the contact | for cables RG 179 BU, 187 AU |

### Version

|                       |                          |
|-----------------------|--------------------------|
| Termination method    | Solder/crimp termination |
| Gender                | Male                     |
| Manufacturing process | Turned contacts          |

### Technical characteristics

|                    |                      |
|--------------------|----------------------|
| Operating current  | $\leq 1.5$ A         |
| Contact resistance | $\leq 10$ m $\Omega$ |
| Impedance          | 75 $\Omega$          |

### Material properties

|                             |                                                        |
|-----------------------------|--------------------------------------------------------|
| Material (contacts)         | Copper alloy                                           |
| Surface (contacts)          | Gold plated                                            |
| RoHS                        | compliant with exemption                               |
| RoHS exemptions             | 6(c): Copper alloy containing up to 4 % lead by weight |
| ELV status                  | compliant with exemption                               |
| China RoHS                  | 50                                                     |
| REACH Annex XVII substances | Not contained                                          |



**Pushing Performance**  
Since 1945

## Material properties

|                                      |                                      |
|--------------------------------------|--------------------------------------|
| REACH ANNEX XIV substances           | Not contained                        |
| REACH SVHC substances                | Yes                                  |
| REACH SVHC substances                | Lead                                 |
| ECHA SCIP number                     | b51e5b97-eeb5-438b-8538-f1771d43c17d |
| California Proposition 65 substances | Yes                                  |
| California Proposition 65 substances | Lead<br>Nickel                       |

## Specifications and approvals

|                |                         |
|----------------|-------------------------|
| Specifications | EN 60664-1<br>IEC 61984 |
|----------------|-------------------------|

## Commercial data

|                                |                                            |
|--------------------------------|--------------------------------------------|
| Packaging size                 | 10                                         |
| Net weight                     | 2.58 g                                     |
| Country of origin              | Hungary                                    |
| European customs tariff number | 85366910                                   |
| eCl@ss                         | 27440204 Contact for industrial connectors |