

Sample image

Datasheet

Article number: 70024297

Designation: KG20A.T104/01.FTF

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Rated insulation voltage Ui						
Voltage (V) AC / DC						
690 AC						
Rated uninterrupted current Iu/Ith						
Current (A)	Ambient temperature (°C)	Peak temperature (°C) additional requirements				
25	50	55 Ambient temperature +50°C during 24 hours with peaks up to +55°C				
Rated operational current Ie						
Utilization category				Voltage (V)		Current (A)
AC-32A				20 - 400		20
Rated operational power						
Utilization category	Voltage (V)	No. of phases		No. of poles		Power (kW)
AC-3	220 - 240	3		3		4
AC-3	380 - 440	3		3		5,50
AC-3	660 - 690	3		3		5,50
AC-23A	220 - 240	3		3		5,50
AC-23A	380 - 440	3		3		7,50
AC-23A	660 - 690	3		3		7,50
Max Fuse Rating IEC						
Fuse characteristic				No. of Fuses		Current (A)
gG				1		35
UL60947-4-1 , UL508						
Nominal Voltage						
Voltage (V) AC / DC						
600 AC						
Rated insulation voltage Ui						
Voltage (V) AC / DC						
600 AC						
Rated thermal current						
Current (A)		Ambient temperature (°C) Additional Text				
25		0 - 40 --				
Horsepower rating						
Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]	
DOL	110 - 120	1	2	1	40	
DOL	220 - 240	1	2	3	40	
DOL	277 - 277	1	2	3	40	
DOL	415 - 415	1	2	5	40	
DOL	440 - 480	1	2	5	40	
DOL	550 - 600	1	2	5	40	
DOL	110 - 120	3	3	2	40	
DOL	200 - 240	3	3	7,50	40	
DOL	415 - 415	3	3	10	40	
DOL	440 - 480	3	3	15	40	
DOL	550 - 600	3	3	20	40	
Pilot duty rating code						
Duty Code						
A600						
SCCR / Max. fuse rating						
Conditions of acceptability						
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.						
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes at 600V max., when protected by 40A Class J fuses.						
Temp. rating of wire						
Temperature rating (°C)			Current (A) Text			
60 - 75			-- --			
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	25	1	1	1	
AC	600	25	1	2	1	
AC	600	25	3	3	1	
General Information						
Text						
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.						

General Information							
Text							
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.							
CSA							
Nominal Voltage							
			Voltage (V) AC / DC				
			600 AC				
Rated insulation voltage Ui							
			Voltage (V) AC / DC				
			600 AC				
Rated thermal current							
		Current (A)	Ambient temperature (°C)		Additional Text		
		25	0 - 40		--		
Horsepower rating							
Across-the-Line Motor Starting			Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL			110 - 120	1	2	1	40
DOL			220 - 240	1	2	3	40
DOL			277 - 277	1	2	3	40
DOL			415 - 415	1	2	5	40
DOL			440 - 480	1	2	5	40
DOL			550 - 600	1	2	5	40
DOL			110 - 120	3	3	2	40
DOL			220 - 240	3	3	7,50	40
DOL			415 - 415	3	3	10	40
DOL			440 - 480	3	3	15	40
DOL			550 - 600	3	3	20	40
Pilot duty rating code							
Duty Code							
A600							
Temp. rating of wire							
		Temperature rating (°C)	Current (A)		Text		
		75	--		--		
General Use							
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series		
AC	277	25	1	1	1		
AC	600	25	1	2	1		
AC	600	25	3	3	1		
GENERAL TECHNICAL INFORMATION							
Tightening torque of screws							
			tightening torque (Nm)		tightening torque (lb-in)		
			1,25		11		
Stripping length							
			Length (mm) --				
			9 STRIPPINGLENGTH				
Size of conductor							
composition of conductor	Min. / Max. value		No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)		Material of the wire	
flexible wire	Max.		1	AWG 10		Copper	
flexible wire	Max.		1	4mm²		Copper	
Single-core or stranded wire	Max.		1	6mm²		Copper	
Single-core or stranded wire	Max.		1	AWG 10		Copper	
flexible wire with sleeve	Max.		1	4mm²		Copper	
Approbations							
Specification						Marking	
EAC							
CE marking							
UK Directives							
CSA C.22.2 No.14							
GB/T14048.3							
Recommended screw driver							
Type of screw driver			Value				
Cross Screwdriver			PH2				
Slot screwdriver according to DIN 5264			0,8x4				
General Information							
Text							
- EMC Note: This device is suitable for use in environment A and B.							
- Do not lubricate or treat contacts.							
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.							
- Use copper wire only. Do not coat the wire end with tin.							

General Information

Text

- Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications.

Waste Electrical & Electronic Equipment (WEEE)

Picture name Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal


Mounting-FT2

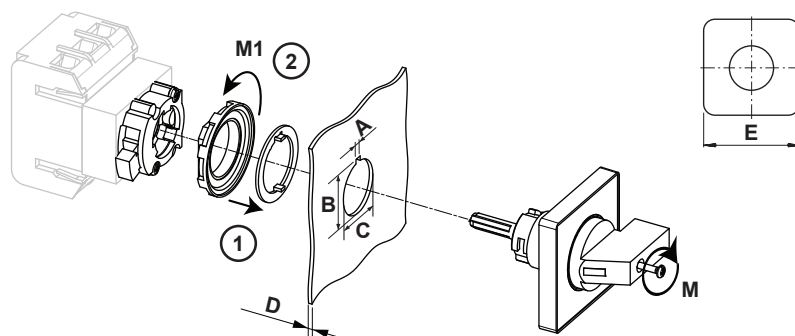

IP - Code front side		IP66, IP67, IP69k
Stages		1,00 - 5,00
A	H	3,20 mm
A+_tol.	H	0,20 mm
A-_tol.	H	0,00 mm
B	H	24,10 mm
B+_tol.	H	0,40 mm
B-_tol.	H	0,00 mm
C	Ø	22,30 mm
C+_tol.	Ø	0,40 mm
C-_tol.	Ø	0,00 mm
D	H	<= 6,00 mm
E	□	48,00 mm
M	M̄	0,50 Nm
M1	M̄	1,80 Nm

Wiring diagram

KG20A.T304.FT2

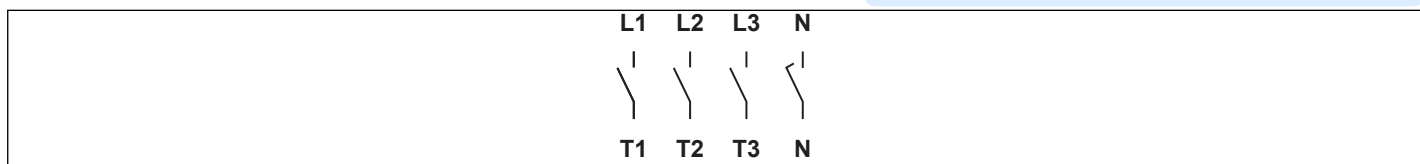


Switch program

KG20A.T304.FT2



Kraus & Naimer


KG20A
T304
Page 1 of 1

Face Plate									
		L1	L2	L3	N				
		1	3	5	7	9	11	13	15
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16
		T1	T2	T3	N				
0	270								
1	0	■	■	■	■				
	90								
	180								

Version: 94

Face plate

S1.F456/C10.V11H

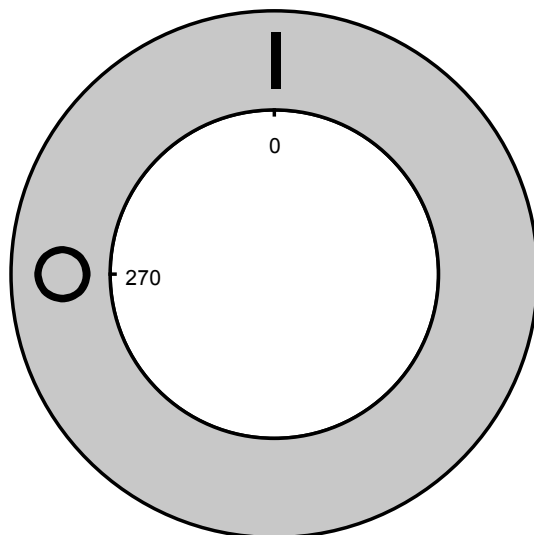



Sample image

PADLOCK DEVICE with F-handle ring

Designation: S1.V840G/A71/F21

Colour of F-handle ring: "A" black

Colour of face ring: "7" electro-grey

Locking position: "1" at 09:00 (1x90°)

Type of mounting: "F" for type of mounting *FT2 and *FH3

Switch type: "2" for KA-, KG- and KH(R)-switches

Type of version: "1" for next smaller switch size (IP65)

