



Sample image

Datasheet

Article number: 70019049

Designation: KG80.T104/33.KL71V

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Tension assignée d'isolement Ui						
Tension (V) AC / DC						
690 AC						
Courant ininterrompu et thermique conventionnel Iu/Ith						
Intensité (A)	Température Ambiante (°)	Température Maxi (°)	Spécification complémentaire			
80	50	55	Température ambiante +50°C durant 24 heures avec point à +55°C			
Courant assigné d'emploi Ie						
Catégorie d'emploi			Tension (V)		Intensité (A)	
AC-32A			20 - 400		80	
Puissance assignée d'emploi						
Catégorie d'emploi	Tension (V)	Nb de phases	Nb de pôles	Puissance (kW)		
AC-3	220 - 240	3	3	15		
AC-3	380 - 440	3	3	22		
AC-3	660 - 690	3	3	18,50		
AC-23A	220 - 240	3	3	18,50		
AC-23A	380 - 440	3	3	30		
AC-23A	660 - 690	3	3	22		
Protection par fusible (IEC)						
Caractéri			Nombre de fusible		Intensité (A)	
gG			1		80	
UL60947-4-1 , UL508						
Nominal Voltage						
Tension (V) AC / DC						
600 AC						
Tension assignée d'isolement Ui						
Tension (V) AC / DC						
600 AC						
Rated thermal current						
Intensité (A)		Température Ambiante (°)		Additional Text		
80		0 - 40		--		
Horsepower rating						
Across-the-Line Motor Starting	Tension (V)	Nb de phases	Nb de pôles	Power (HP)	Ambient temperature [°C]	
DOL	110 - 120	1	2	5	40	
DOL	220 - 240	1	2	10	40	
DOL	277 - 277	1	2	15	40	
DOL	415 - 415	1	2	20	40	
DOL	440 - 480	1	2	20	40	
DOL	550 - 600	1	2	30	40	
DOL	110 - 120	3	3	10	40	
DOL	220 - 240	3	3	25	40	
DOL	415 - 415	3	3	30	40	
DOL	440 - 480	3	3	50	40	
DOL	550 - 600	3	3	50	40	
SCCR / Max. fuse rating						
Conditions of acceptability						
These devices are suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses or Circuit Breaker Type SFHA36AT0250, manufactured by General Electric.						
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes 600V max., when protected by Class J fuses, 100A max.						
Temp. rating of wire						
Temperature rating (°C)			Intensité (A) Text			
75			-- --			
Connecting instructions						
Markings						
Break all lines.						
General Use						
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series	
AC	277	80	1	1	1	

General Use					
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series
AC	600	80	1	2	1
AC	600	80	3	3	1

General Information

Text

- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.

- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.

CSA

Nominal Voltage

Tension (V) AC / DC
600 AC

Tension assignée d'isolement Ui

Tension (V) AC / DC
600 AC

Rated thermal current

Intensité (A) Température Ambiante (°) Additional Text
80 0 - 40 -

Horsepower rating

Across-the-Line Motor Starting	Tension (V)	Nb de phases	Nb de pôles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	5	40
DOL	220 - 240	1	2	10	40
DOL	277 - 277	1	2	15	40
DOL	415 - 415	1	2	20	40
DOL	440 - 480	1	2	20	40
DOL	550 - 600	1	2	30	40
DOL	110 - 120	3	3	10	40
DOL	220 - 240	3	3	25	40
DOL	415 - 415	3	3	30	40
DOL	440 - 480	3	3	50	40
DOL	550 - 600	3	3	50	40

Temp. rating of wire

Temperature rating (°C) Intensité (A) Text
75 -- --

General Use

AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series
AC	277	80	1	1	1
AC	600	80	1	2	1
AC	600	80	3	3	1

GENERAL TECHNICAL INFORMATION

Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)	Material of the wire
solid wire	Min.	1	2,5mm²	Copper
flexible wire	Min.	1	4mm²	Copper
flexible wire	Max.	1	35mm²	Copper
flexible wire	Max.	1	AWG 2	Copper
Single-core or stranded wire	Max.	1	AWG 1/0	Copper
Single-core or stranded wire	Max.	1	50mm²	Copper
flexible wire with sleeve	Max.	1	35mm²	Copper
flexible wire with ferrule according to DIN 46228	Min.	1	2,5mm²	Copper

Stripping length

Length (mm) --



Recommandations concernant le tournevis

Type	Value
Tournevis cruciforme	PH2
Slot screwdriver according to DIN 5264	1,2x6,5

Tightening torque of screws

tightening torque (Nm) tightening torque (lb-in)
3 27

Approbations

Specification	Marking
EAC	
CE marking	
UK Directives	
CSA C.22.2 No.14	
GB/T14048.3	

General Information

Text

- EMC Note: This device is suitable for use in environment A and B.
- Ne jamais lubrifier ou traiter les contacts.
- Les commutateurs ne peuvent être montés, branchés et mis en service que par une personne qualifiée selon les règles techniques en vigueur.
- Use copper wire only. Do not coat the wire end with tin.
- Les bornes qui ne sont pas supposées être utilisées pour le raccordement de l'appareil sont livrées serrées et ne doivent pas être desserrées. Si toutefois ces bornes sont malgré tout ouvertes accidentellement, vérifier qu'aucun shunt n'est manquant. Le câblage terminé, s'assurer que toutes les bornes sont serrées.

Waste Electrical & Electronic Equipment (WEEE)

Picture name Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Type de contacts: Rigid contact bridge

Revêtement des Contacts: Silver

Types de raccordement: Screw terminal

Mounting-KL71V

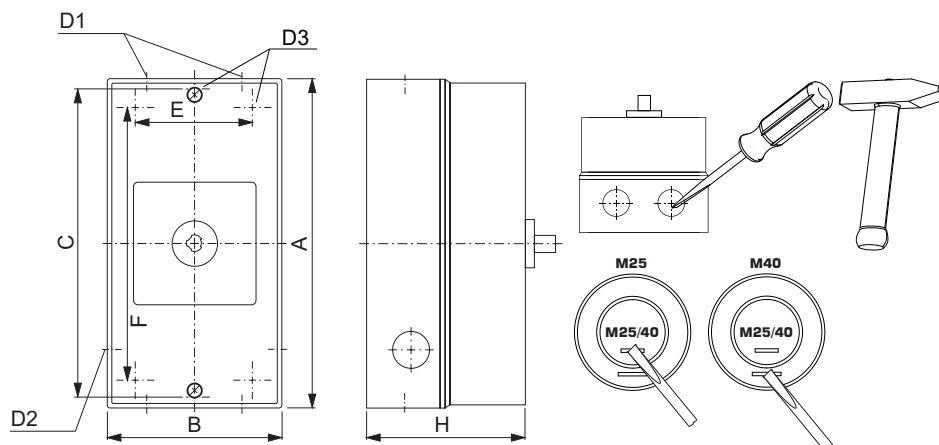


IP - Code front side	IP66, IP67, IP69k
Stages	2,00 - 5,00
A	H 250,00 mm
B	H 145,00 mm
D1	Ø 4,00 x M40/M25
D2	Ø 2,00 x M25
D3	Ø 6,50 mm
E	H 124,00 mm
F	H 229,00 mm
H	H 107,00 mm



Wiring diagram

KG80.T304.KL71V

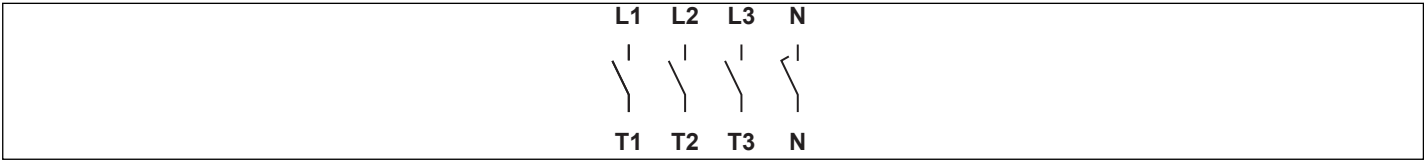

Switch program


KG80.T304.KL71V



Kraus & Naimer

KG80
T304

Page 1 of 1

Face Plate									
		L1	L2	L3	N				
		1	3	5	7	9	11	13	15
   									
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16
		T1	T2	T3	N				
0	270								
1	0	■	■	■	■				
	90								
	180								

Version: 94

Face plate

S1.F656/C10.V9

