



Sample image

Datasheet

Article number: 70010099

Designation: KG41.T103/40.KL11V

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Märkdriftspänning Ui					
Spänning (V) AC / DC					
690 AC					
Märkdriftström vid konstant drift					
Ström (A)	Omgivningstemperatur (°C)	Temperatur topp (°C) ytterligare krav			
40	50	55 Omginingstemperatur +50°C under 24 timmar med toppar upp till +55°C			
Märkdriftström Ie					
Urvals kriterie		Spänning (V)			Ström (A)
AC-32A		20 - 400			40
Märkdrifteffekt					
Urvals kriterie	Spänning (V)	No. of phases		No. of poles	Effekt (kW)
AC-3	220 - 240	3		3	7,50
AC-3	380 - 440	3		3	11
AC-3	660 - 690	3		3	11
AC-23A	220 - 240	3		3	7,50
AC-23A	380 - 440	3		3	15
AC-23A	660 - 690	3		3	15
Max försäkring, IEC					
Säkringskaraktéristik				Antal säkringar	Ström (A)
gG				1	50
UL60947-4-1 , UL508					
Nominal Voltage					
Spänning (V) AC / DC					
600 AC					
Märkdriftspänning Ui					
Spänning (V) AC / DC					
600 AC					
Rated thermal current					
Ström (A)		Omgivningstemperatur (°C) Additional Text			
42		0 - 40 --			
Horsepower rating					
Across-the-Line Motor Starting		Spänning (V)	No. of phases	No. of poles	Power (HP)
DOL		110 - 120	1	2	2
DOL		220 - 240	1	2	5
DOL		277 - 277	1	2	7,50
DOL		415 - 415	1	2	7,50
DOL		440 - 480	1	2	10
DOL		550 - 600	1	2	10
DOL		110 - 120	3	3	5
DOL		220 - 240	3	3	15
DOL		415 - 415	3	3	15
DOL		440 - 480	3	3	25
DOL		550 - 600	3	3	30
Pilot duty rating code					
Duty Code					
A600					
SCCR / Max. fuse rating					
Conditions of acceptability					
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.					
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes 600V max., when protected by 60A Class J fuses.					
Temp. rating of wire					
Temperature rating (°C)			Ström (A) Text		
60 - 75			-- --		
General Use					
AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	42	1	1	1
AC	600	42	1	2	1
AC	600	42	3	3	1
General Information					
Text					
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.					

General Information						
Text						
- När brytaren används som säkerhetsbrytare skall den vara utrustad med vred som är låsbart i läge "0".						
CSA						
Nominal Voltage						
			Spänning (V) AC / DC			
			600 AC			
Märkdriftspänning Ui						
			Spänning (V) AC / DC			
			600 AC			
Rated thermal current						
		Ström (A)	Omgivningstemperatur (°C)		Additional Text	
		40	0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting		Spänning (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	2	40
DOL		220 - 240	1	2	5	40
DOL		277 - 277	1	2	7,50	40
DOL		415 - 415	1	2	7,50	40
DOL		440 - 480	1	2	10	40
DOL		550 - 600	1	2	10	40
DOL		110 - 120	3	3	5	40
DOL		220 - 240	3	3	15	40
DOL		415 - 415	3	3	15	40
DOL		440 - 480	3	3	25	40
DOL		550 - 600	3	3	30	40
Temp. rating of wire						
Temperature rating (°C)			Ström (A) Text			
75			-- --			
General Use						
AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	40	1	1	1	
AC	600	40	1	2	1	
AC	600	40	3	3	1	
GENERAL TECHNICAL INFORMATION						
Size of conductor						
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)		Material of the wire	
solid wire	Min.	2	0,75mm²		Copper	
solid wire	Min.	1	1,5mm²		Copper	
flexible wire	Max.	1	AWG 6		Copper	
flexible wire	Min.	1	2,5mm²		Copper	
flexible wire	Max.	1	10mm²		Copper	
flexible wire	Min.	2	1,5mm²		Copper	
Single-core or stranded wire	Max.	1	AWG 6		Copper	
Single-core or stranded wire	Max.	1	16mm²		Copper	
flexible wire with sleeve	Max.	1	10mm²		Copper	
flexible wire with ferrule according to DIN 46228	Min.	2	0,75mm²		Copper	
flexible wire with ferrule according to DIN 46228	Min.	1	1,5mm²		Copper	
Stripping length						
			Length (mm) --			
						
Rekomenderad skruvmejsel						
Typ av skruvmejsel		Value				
Stjärnskruvmejsel		PH2				
Slot screwdriver according to DIN 5264		1,2x6,5				
Tightening torque of screws						
			tightening torque (Nm)		tightening torque (lb-in)	
			1,80		16	
Approbations						
Specification					Marking	
EAC						
CE marking						
UK Directives						
CSA C.22.2 No.14						
GB/T14048.3						
General Information						
Text						
- EMC Note: This device is suitable for use in environment A and B.						

General Information

Text

- Smörjning och behandling av kontakterna är förbjuden.
- Inkoppling och service av strömställaren får endast utföras av behörig personal. Strömställaren är underhållsfri.
- Använd endast kopparkabel. Kabeln får inte förtennas.
- Alla anslutningsskruvar måste dras med rekommenderat moment, även de som inte används då det kan finnas interna överkopplingar.

Waste Electrical & Electronic Equipment (WEEE)

Picture name Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-KL11V

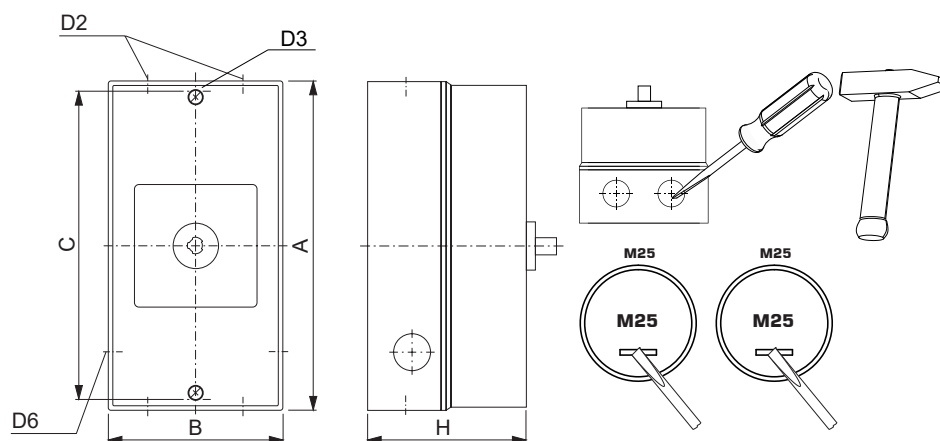

Skyddsklass frontpanel, IP		IP66, IP67, IP69k
Stages		1,00 - 5,00
A	H	190,00 mm
B	H	100,00 mm
C	H	178,00 mm
D2	Ø	4,00 x M25
D3	Ø	5,60 mm
D6	Ø	2,00 x M25
H	H	93,00 mm



Wiring diagram

KG41.T303.KL11V



Switch program

KG41.T303.KL11V



Kraus & Naimer

KG41
T303
Page 1 of 1

Face Plate									
		L1	L2	L3					
		1	3	5	7	9	11	13	15
  									
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16
		T1	T2	T3					
0	270								
1	0	■	■	■					
	90								
	180								

Version: 102

Face plate

S1.F656/C10.V9



AUXILIARY CONTACTS

(cam operated) for switch type KG20 - KG100C and KH(R)16 - KH(R)25B

Designation: K1.M510A/2CA-B

Number of contacts: "2" 2 auxiliary contacts

Operation of contacts: "C" 1 auxiliary contact closed in pos. 1 and 1 auxiliary contact closed in pos. 0 (NO/NC)

Type of version: "A" 1. auxiliary contact module

Type of mounting: "-B" for type of mounting VE, VE2, silver contacts

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Nominal Voltage					
			Spänning (V) AC / DC		
			690 AC		
Märkdraftström vid konstant drift					
Ström (A)	Omgivningstemperatur (°C)	Temperatur topp (°C)		ytterligare krav	
16	55	60		Omginingstemperatur +55°C under 24 timmar med toppar upp till +60°C	
Märkdraftström Ie					
Urvals kriterie			Spänning (V)		Ström (A)
AC-15			110 - 240		6
AC-15			380 - 440		3
AC-15			500		1,50
AC-21A			20 - 690		16
UL60947-4-1 , UL508					
Nominal Voltage					
			Spänning (V) AC / DC		
			600 AC		
Märkdraftspänning Ui					
			Spänning (V) AC / DC		
			600 AC		
Rated thermal current					
Ström (A)		Omgivningstemperatur (°C)		Additional Text	
10		0 - 40		--	
Pilot duty rating code					
Duty Code					
A600					
General Use					
AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series
AC	600	10	1	1	1
GENERAL TECHNICAL INFORMATION					
Size of conductor					
composition of conductor	Min. / Max. value	No. of conductor per terminal		Cross section (mm²) or (AWG/kcmil)	Material of the wire
solid wire	Min.	1		0,5mm²	Copper
solid wire	Min.	2		0,5mm²	Copper
flexible wire	Min.	1		0,75mm²	Copper
flexible wire	Min.	2		0,75mm²	Copper
flexible wire	Max.	2		2,5mm²	Copper
flexible wire	Max.	2		AWG 14	Copper
Single-core or stranded wire	Max.	2		AWG 12	Copper
Single-core or stranded wire	Max.	2		2,5mm²	Copper
flexible wire with ferrule according to DIN 46228	Max.	2		2,5mm²	Copper
flexible wire with ferrule according to DIN 46228	Min.	1		0,5mm²	Copper
flexible wire with ferrule according to DIN 46228	Min.	2		0,5mm²	Copper
Stripping length					
Length (mm) --					
					
8					
Rekomenderad skruvmejsel					
Typ av skruvmejsel			Value		
Stjärnskruvmejsel			PH1		
Slot screwdriver according to DIN 5264			0,8x4		
Tightening torque of screws					
			tightening torque (Nm)		tightening torque (lb-in)
			0.60		

General Information

Text

- Smörjning och behandling av kontakterna är förbjuden.
- Inkoppling och service av strömställaren får endast utföras av behörig personal. Strömställaren är underhållsfri.
- Använd endast kopparkabel. Kabeln får inte förtennas.

13	21
14	22