## Equinox *EQUINOX 165 2500 940 DALI* **2059949**

#### **Product features**



Equinox is an elegant and innovative luminaire designed using the latest optical technology. It is a high
quality and efficient lighting solution for office, hospitality, and retail environments. It creates
inspirational halo effects regulated by a unique adjustable optic system. It is DALI dimmable downlight
luminaire, Colour rendering index Ra >90, Colour temperature: 4000K Neutral White, Class II, Cut out
dimensions: 165mm. Low Glare UGR<19.</li>


















### **PRODUCT OVERVIEW**

Technology  Cap/Base  N/A  Housing  Aluminium  Mount  Ceiling recessed mounting  General application  ETIM Class  EC001744  Warranty  5 years  Fixture luminous flux (Im)  Luminaire efficacy (Im/W)  Class  Colour temperature (K)  Neutral White
Housing Aluminium  Mount Ceiling recessed mounting  General application Office  ETIM Class EC001744  Warranty 5 years  Fixture luminous flux (Im) 2500  Luminaire efficacy (Im/W) 125  Colour temperature (K) 4000
Mount Ceiling recessed mounting General application Office ETIM Class EC001744 Warranty 5 years Fixture luminous flux (Im) 2500 Luminaire efficacy (Im/W) 125 Colour temperature (K) 4000
General application Office ETIM Class EC001744 Warranty 5 years Fixture luminous flux (Im) 2500 Luminaire efficacy (Im/W) 125 Colour temperature (K) 4000
ETIM Class         EC001744           Warranty         5 years           Fixture luminous flux (lm)         2500           Luminaire efficacy (lm/W)         125           Colour temperature (K)         4000
Warranty 5 years  Fixture luminous flux (lm) 2500  Luminaire efficacy (lm/W) 125  Colour temperature (K) 4000
Fixture luminous flux (Im) 2500 Luminaire efficacy (Im/W) 125 Colour temperature (K) 4000
Luminaire efficacy (lm/W) 125 Colour temperature (K) 4000
Colour temperature (K) 4000
• • • •
Light colour Neutral White
Light colour Medical White
<b>CRI (Ra)</b> 90
Colour Variation Initial (SDCM) SDCM3
Colour Consistency (SDCM) 3
Beam Angle (°) 64
Glare control < 19
Photobiological Risk Group RG1
Total power consumption (W) 20
Electrical protection Class II
Control gear type LED driver constant current
Control gear mounting Remote
<b>Dimmable</b> Yes
Dimming method DALI, Switch-dim (mains-rated)
Minimum dimming level (%)
Housing colour RAL 9016 - Traffic white / Bezel
IP rating IP20
IK rating IK02
Product EAN number 5025768599493

# Equinox *EQUINOX 165 2500 940 DALI* **2059949**

### **PHOTOMETRY**

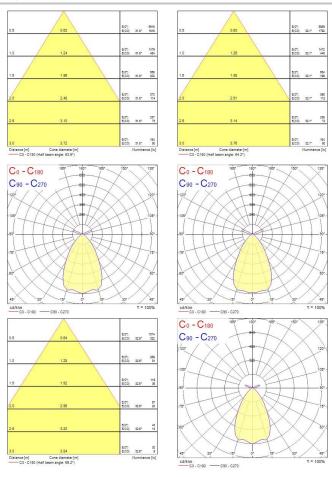

### **TECHNICAL DRAWINGS**

