


START Downlight Flat Dimmable 172mm Round Surface

START eco Downlight Flat 172 1200lm 840 DIM Surface
0053947



Product features

- START eco Downlight Flat DIM Surface is an integrated LED surface mounted downlight with a separate, phase dimmable driver and loop in- out box, 12W; 1200Lm; 100Lm/W; 4000K; IP20.

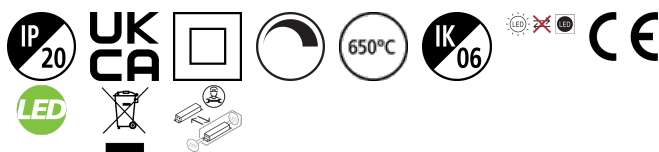

PRODUCT OVERVIEW


| | |
|---------------------------------|---|
| Product name | START eco Downlight Flat 172 1200lm 840 DIM Surface |
| Technology | LED |
| Housing | Aluminium |
| Mount | Ceiling surface mounting |
| General application | Hospitality |
| ETIM Class | EC001744 |
| E-number FI | 4278200 |
| Warranty | 3 years |
| Fixture luminous flux (lm) | 1200 |
| Luminaire efficacy (lm/W) | 100 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM5 |
| Beam Angle (°) | 120 |
| Glare control | < 28 |
| Photobiological Risk Group | RG0 |
| Max load (A) | 120 |
| Total power consumption (W) | 12 |
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| Dimming method | Mains: leading / trailing edge |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | RAL 9003 - Signal white |
| IP rating | IP20 |
| IK rating | IK06 |
| Product EAN number | 5410288539478 |

PHOTOMETRY

START Downlight Flat Dimmable 172mm Round Surface

START eco Downlight Flat 172 1200lm 840 DIM Surface

0053947

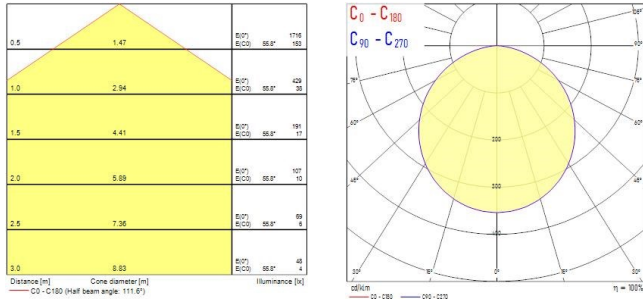

TECHNICAL DRAWINGS

