



Features


- A click diffuser made of acrylic thermoplastic (PMMA). Operating temperature: -20 - 70 [°C]. IK rating: 08. UV resistant. Fire hazard certificate according to IEC 60695-2-11. Compatible with the following profiles: Profile recess 20 EF/U7 (0022596), Profile semi deep surface 20 EF/T (0022598), Profile shallow narrow 14 EF/T (0022601), Profile corner surface 14 EF/T (0022602). Transparency level 75%.

Product Overview

Product name	Cover F click 2m opal
Technology	Accessory
Housing	Aluminium
General application	Retail
ETIM Class	EC002557
E-number FI	4278036
Housing colour	Silver
Product EAN number	5410288226194
Warranty	3 years

Cover F click 2m opal
0022619

Technical drawings

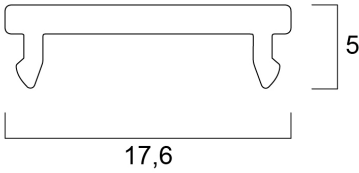

Data table

GENERAL DATA

Product name	Cover F click 2m opal
Technology	Accessory
Housing	Aluminium
General application	Retail
ETIM Class	EC002557
E-number FI	4278036
Warranty	3 years

ELECTRICAL DATA

Control gear required	No
-----------------------	----

PHYSICAL DATA

Housing colour	Silver
Diffuser finish	Opal
Nominal Product Length (mm)	2000

Cover F click 2m opal 0022619

Nominal Product Width (mm)	17.6
Nominal Product Height (mm)	5
Weight (kg)	0.12

PACKAGING

Single packaging type	Carton
Product EAN number	5410288226194
Packaging single length / height (cm)	200.0
Packaging single width (cm)	2.0
Packaging single depth (cm)	2.0
DUN14 (outer)	05410288226194
Units per outer package	100
Packaging outer length / height (cm)	205.0
Packaging outer width (cm)	16.0
Packaging outer depth (cm)	16.0

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No