

Features

- LED Panel with backlit technology, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Extruded aluminium frame, passive cooling. Low glaring UGR<22. RG0, 112 degree beam angle , optical system: PS diffuser with Opal finish. Light color temperature: 4000K Neutral White, total system power: 36W , total fixture output: 3200lm, efficacy: 89 lm/W, Ra80 typical, LED chromacity: 6 step MacAdam ellipse (SDCM6), lifespan: 100,000 hours at 70% of the original output (L70B50), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, non dimmable driver, electrical protection: Class II. Degree of Protection: IP40/IP20, suitable for indoor environment only. Nominal size: 595x595mm, Loop in / loop out wiring, safety cables included, 25mm nominal height, White color frame, weight: 1,6Kg.


Product Overview

| | |
|-----------------------------------|---|
| Product name | START Panel 3YW 600x600 3200Lm 840 LILO |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium, Steel |
| Mount | Ceiling recessed mounting |
| General application | Education, Office |
| ETIM Class | EC002892 |
| E-number FI | 4278453 |
| Fixture luminous flux (lm) | 3200 |
| Luminaire efficacy (lm/W) | 89 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |

START Panel 3YW 600x600 3200Lm 840 LILO 0042808

| | |
|---------------------------------|-----------------------------|
| Colour Variation Initial (SDCM) | 6 |
| Beam Angle (°) | 112 |
| Glare control | < 22 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 36 |
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| Dimmable | No |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | RAL 9003 - Signal white |
| IP rating | IP40/20 |
| IK rating | IK02 |
| Product EAN number | 5410288428086 |
| Warranty | 3 years |
| Dimming method | N/A |

Photometry

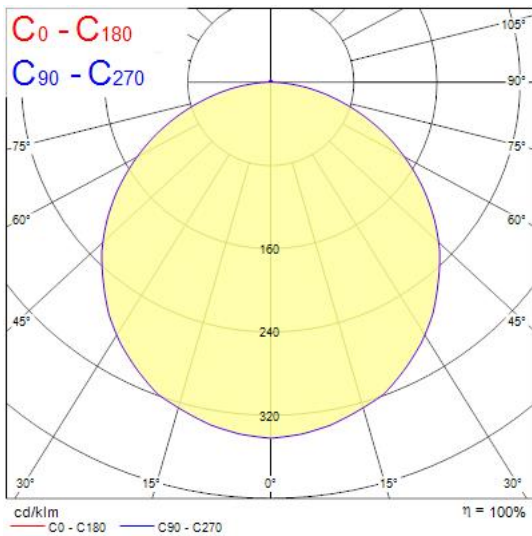

Technical drawings

