

START eco Panel 600x600


START eco Panel 600x600 3200Lm 840 LILO

0048401



Product features

- Back lit LED panel, Low Flicker, 36 W, Neutral White, 4000 K, 3200 lumens, 89 lm/W, Average lifespan: 100.000Hrs, electronic non dimmable driver. (HxWxD) 34 x 595 x 595 mm. Loop in loop out box allows for quick installation.

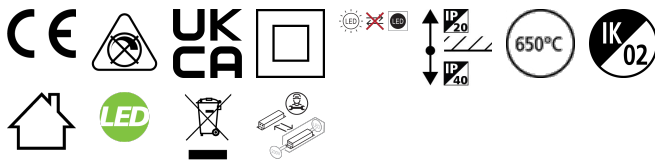


PRODUCT OVERVIEW

Product name	START eco Panel 600x600 3200Lm 840 LILO
Technology	LED
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
Environment	Interior
General application	Education, Office
ETIM Class	EC002892
E-number FI	4278134
Warranty	3 years
Fixture luminous flux (lm)	3200
Luminaire efficacy (lm/W)	89
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	112
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK02
Product EAN number	5410288484013

PHOTOMETRY

START eco Panel 600x600

START eco Panel 600x600 3200Lm 840 LILO
0048401

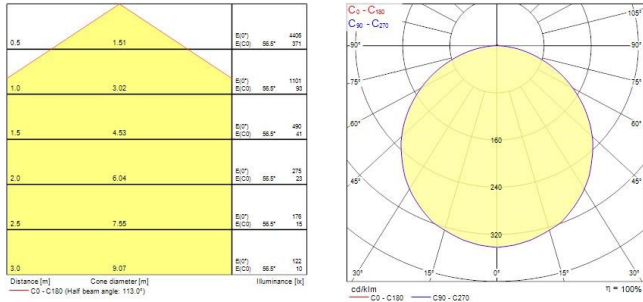

TECHNICAL DRAWINGS

