

Sylproof Superia Acrylic - T8 Magnetic ballast
Sylproof Superia Acrylic T8 26mmØ 1x36W lamp with B2 ballast PC
0056306



Product features



PRODUCT OVERVIEW

Product name	Sylproof Superia Acrylic T8 26mmØ 1x36W lamp with B2 ballast PC
Technology	Fluorescent
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Interior
General application	Hospitality, Logistics & Industry
ETIM Class	EC000109
E-number Norway	3319509
Warranty	2 years
LOR (%)	74
Electrical protection	Class I
Control gear type	Other
Control gear mounting	Integral
Housing colour	Grey
IP rating	IP65
IK rating	IK02
Product EAN number	5410288563060

DATA TABLE

General data	
Product name	Sylproof Superia Acrylic T8 26mmØ 1x36W lamp with B2 ballast PC
Technology	Fluorescent
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Interior
General application	Hospitality, Logistics & Industry
ETIM Class	EC000109
E-number Norway	3319509
Warranty	2 years
Optical data	
LOR (%)	74

Sylproof Superia Acrylic - T8 Magnetic ballast

Sylproof Superia Acrylic T8 26mmØ 1x36W lamp with B2 ballast PC
0056306

Adjustable chromaticity	N
Distribution type	Symmetric

Electrical data

Mains voltage (V)	230V
Electrical protection	Class I
Control gear type	Other
Control gear mounting	Integral
Transformer required	Yes
Glow Wire Test (°C)	650


Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK02
Diffuser finish	Prismatic
Diffuser material	PMMA Acrylic
Nominal Product Length (mm)	1265
Nominal Product Width (mm)	92
Nominal Product Height (mm)	99
Weight (kg)	2.278

Packaging

Single packaging type	Carton
Product EAN number	5410288563060
Packaging single length / height (cm)	127.7
Packaging single width (cm)	9.9
Packaging single depth (cm)	6.6
DUN14 (outer)	05410288563060
Units per outer package	1
Packaging outer length / height (cm)	127.7
Packaging outer width (cm)	9.9
Packaging outer depth (cm)	6.6

PHOTOMETRY

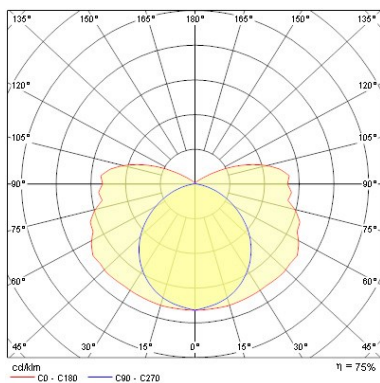



Sylproof Superia Acrylic - T8 Magnetic ballast

Sylproof Superia Acrylic T8 26mmØ 1x36W lamp with B2 ballast PC

0056306

TECHNICAL DRAWINGS

Dimensions (mm)

Lamp	L	I	H	P
1x18/14/24 - 2x14/24W	662	92	99	400
1x36/28/54 - 2x28W	1265	92	99	900
1x58/35/80/80 - 2x35/49W	1565	92	99	930
1x70W	1865	92	99	1026
2x18W	662	137	99	400
2x36/54W	1265	137	99	900
2x58W	1565	137	99	930
2x70W	1865	137	99	1026

