


## START Panel UGR19 600x600 SylSmart StandAlone

START Panel UGR19 600x600 3800Lm 830 SSC  
0042506



### Product features

- START Panel is a range of backlit LED panels used in recessed ceilings. Ideal for general indoor applications such as corridors, breakrooms, offices and meeting rooms. Luminaire dimensions are compatible with common ceiling installation, and the shallow design makes it easy to install in low ceilings. 3800Lm; 36W; 106Lm/W; Drive current: 750mA; Average lifespan: 100.000Hrs; 3000K; CRI 80; Glare control <19; IK03; IP40 (from the front); SDCM<3; Class II; Loop in loop out connector for quick installation. Not compatible with surface mounting frames. SylSmart Standalone (SSC) enabled.

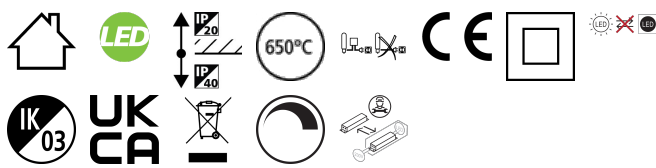

### PRODUCT OVERVIEW

Product name	START Panel UGR19 600x600 3800Lm 830 SSC
Technology	LED
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
E-number FI	4278371
Warranty	5 years
Fixture luminous flux (lm)	3800
Luminaire efficacy (lm/W)	106
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSC
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288425061

### DATA TABLE

#### General data

## START Panel UGR19 600x600 SylSmart StandAlone

*START Panel UGR19 600x600 3800Lm 830 SSC*  
0042506

Product name	START Panel UGR19 600x600 3800Lm 830 SSC
Technology	LED
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Education, Office
Operating temperature range (°C)	-10°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4278371
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	3800
Luminaire efficacy (lm/W)	106
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

### Electrical data

Total power consumption (W)	36
Mains voltage (V)	220-240V
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	5
Electrical protection	Class II
Control gear required	Yes
Control gear type	LED driver constant current
Transformer required	No
Dimmable	Yes
Dimming method	SylSmart SSC
Minimum dimming level (%)	1
Drive current (mA)	750
Inrush Current (A)	23
Inrush Duration (µs)	200
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	23
Max. Luminaires per 13A C Breaker	31
Max. Luminaires per 16A C Breaker	38
Max. Luminaires per 20A C Breaker	48
Max. Luminaires per 10A B Breaker	14
Max. Luminaires per 13A B Breaker	19

## START Panel UGR19 600x600 SylSmart StandAlone

*START Panel UGR19 600x600 3800Lm 830 SSC*  
0042506

Max. Luminaires per 16A B Breaker	23
Max. Luminaires per 20A B Breaker	29

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	71000

### Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Diffuser finish	Prismatic
Diffuser material	Other
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	35
Weight (kg)	1.8

### Packaging

Single packaging type	Carton
Product EAN number	5410288425061
Packaging single length / height (cm)	60.0
Packaging single width (cm)	68.5
Packaging single depth (cm)	3.8
DUN14 (inner)	25410288425065
Units per inner package	2
Packaging inner length / height (cm)	65.0
Packaging inner width (cm)	72.0
Packaging inner depth (cm)	10.6
DUN14 (outer)	15410288425068
Units per outer package	40
Packaging outer length / height (cm)	126.0
Packaging outer width (cm)	72.0
Packaging outer depth (cm)	101.0

### Safety data

Optimal operating condition (°C)	-10-45
----------------------------------	--------


## PHOTOMETRY

## START Panel UGR19 600x600 SylSmart StandAlone *START Panel UGR19 600x600 3800Lm 830 SSC* 0042506

0.5	0.82 0.92	E(0°) 7732 E(C90) 1756 E(C0) 1553
1.0	1.65 1.83	E(0°) 1903 E(C90) 446 E(C0) 399
1.5	2.47 2.75	E(0°) 559 E(C90) 196 E(C0) 173
2.0	3.30 3.67	E(0°) 453 E(C90) 152 E(C0) 97
2.5	4.12 4.58	E(0°) 309 E(C90) 71 E(C0) 52
3.0	4.95 5.50	E(0°) 215 E(C90) 60 E(C0) 43

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 85.0°)  
 — C90 - C270 (Half beam angle: 75.0°)

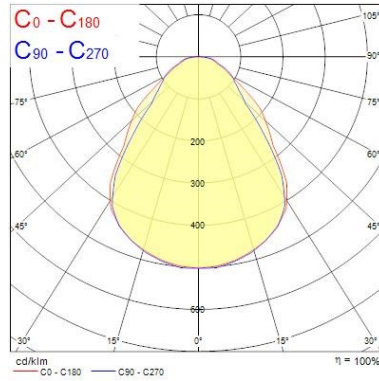

### TECHNICAL DRAWINGS

