

## START Panel IP54 600x600


START PANEL IP54 MLTPWR 600 4900LM 830 GST18/3

0047042



### Product features

- START Panel IP54 is a range of recessed integrated LED panels for general indoor lighting applications such as breakout areas, offices and meeting rooms. With the help of DIP Switch multiple lumen outputs can be set up in 8 steps (13W 1725lm, 16W 2250lm, 19W 2700lm, 23W 3250lm, 25W 3450lm, 29W 4000lm, 32W 4400lm, 36W 4900lm). Max. drive current: 165mA; Max. power: 36W; Average lifespan: 100.000Hrs; 3000K; CRI 80; Efficacy up to: 136Lm/W; Fixture lumen up to: 4900lm; IK03; IP54 (from the front); Class II; Wieland connector included.









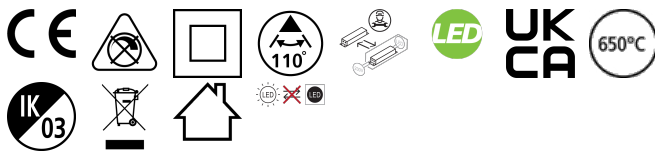


### PRODUCT OVERVIEW

Product name	START PANEL IP54 MLTPWR 600 4900LM 830 GST18/3
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	4900
Luminaire efficacy (lm/W)	136
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	110
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class II
Control gear type	Electronic ballast multiwatt
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP54/20
IK rating	IK03
Product EAN number	5410288470429

### PHOTOMETRY

## START Panel IP54 600x600 START PANEL IP54 MLTPWR 600 4900LM 830 GST18/3 0047042

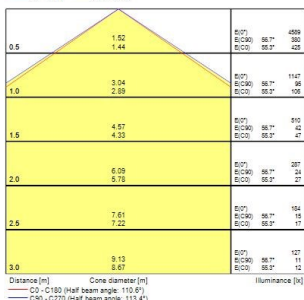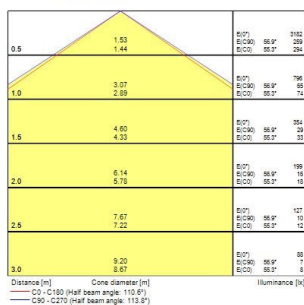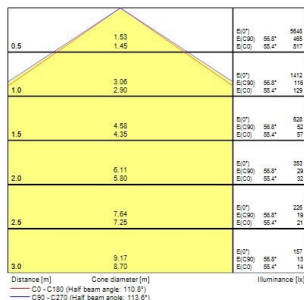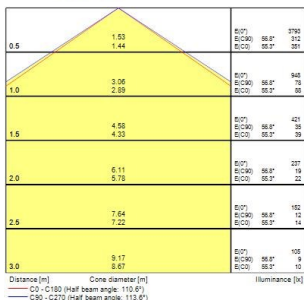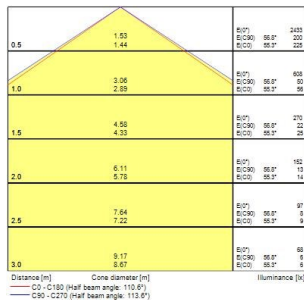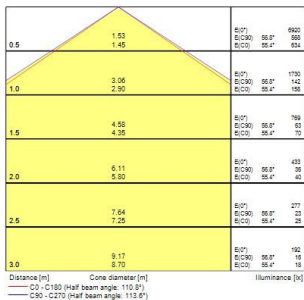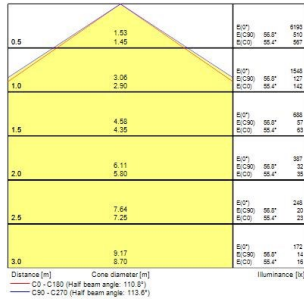

## START Panel IP54 600x600

START PANEL IP54 MLTPWR 600 4900LM 830 GST18/3  
0047042

### TECHNICAL DRAWINGS

