


Ascent 100 II Arch 120 IP65

ASCENT 100 II ARCH 620 3K IP65 DALI EMG 120
2060687



Product features

- The ASCENT 100 II ARCH 620 3K DALI EMG 120 is a high efficient DALI dimmable downlight luminaire with 3 hour emergency, Colour rendering index Ra >80, Colour temperature: 3000K Warm White, Class II, Protection rating IP65/IK02, Cut out dimensions: 137mm

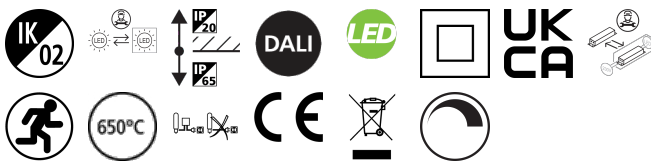


PRODUCT OVERVIEW

Product name	ASCENT 100 II ARCH 620 3K IP65 DALI EMG 120
Technology	LED
Cap/Base	Cable
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	620
Luminous flux (lm)	620
Luminaire efficacy (lm/W)	89
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Beam Angle (°)	85
Glare control	< 21
Photobiological Risk Group	RG0
Total power consumption (W)	7
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Remote
Dimmable	Yes
Dimming method	DALI, Switch-dim (mains-rated)
Minimum dimming level (%)	1
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP65/20
IK rating	IK02
Product EAN number	5025768606870

Ascent 100 II Arch 120 IP65

ASCENT 100 II ARCH 620 3K IP65 DALI EMG 120
2060687

PHOTOMETRY

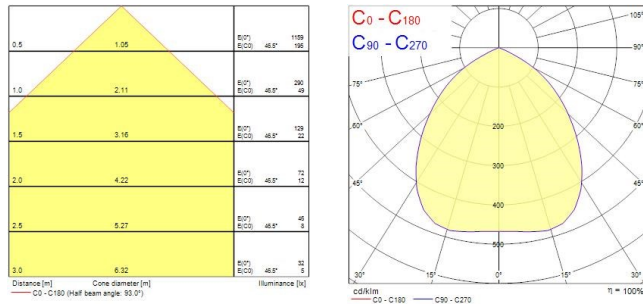

TECHNICAL DRAWINGS

