

Ascent 150 II Wallwasher

ASCENT 150 II WW 3600 3K STD

2059376



Product features

- The ASCENT 150 II WW 3600 3K STD is a high efficient downlight luminaire , Colour rendering index Ra >80, Colour temperature: 3000K Warm white, Class II, Protection rating IP44/IK03



PRODUCT OVERVIEW

Product name	ASCENT 150 II WW 3600 3K STD
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Internal
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4237891
Warranty	5 years
Fixture luminous flux (lm)	3600
Luminaire efficacy (lm/W)	133
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG0
Total power consumption (W)	27
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Housing colour	Aluminium
IP rating	IP44/20
IK rating	IK03
Product EAN number	5025768593767

DATA TABLE

Ascent 150 II Wallwasher

ASCENT 150 II WW 3600 3K STD
2059376

General data

Product name	ASCENT 150 II WW 3600 3K STD
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Internal
General application	Hospitality, Office, Retail
Operating temperature range (°C)	25°C...+25°C
Performance ambient temperature T _q (°C)	25
ETIM Class	EC001744
E-number FI	4237891
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3600
Luminaire efficacy (lm/W)	133
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Distribution type	Asymmetric
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	27
Mains voltage (V)	220-240V
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class II
Control gear type	Electronic ballast
Transformer required	Yes
Dimmable	No
Dimming method	N/A
Drive current (mA)	1050
Inrush Current (A)	10
Inrush Duration (µs)	100
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60/HF
Max. Luminaires per 10A C Breaker	35
Max. Luminaires per 13A C Breaker	50
Max. Luminaires per 16A C Breaker	65
Max. Luminaires per 20A C Breaker	75

Ascent 150 II Wallwasher

ASCENT 150 II WW 3600 3K STD
2059376

Max. Luminaires per 10A B Breaker	35
Max. Luminaires per 13A B Breaker	50
Max. Luminaires per 16A B Breaker	65
Max. Luminaires per 20A B Breaker	75

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	55000

Physical data

Housing colour	Aluminium
IP rating	IP44/20
IK rating	IK03
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Reflector finish	Other
Nominal Product Width (mm)	248
Nominal Product Height (mm)	156
Nominal Product Diameter (mm)	248
Cutout Dimensions (W x L in mm or Diameter in mm)	235
Weight (kg)	0.975
Recessed Depth (mm)	180

Packaging


Single packaging type	Carton
Product EAN number	5025768593767
Packaging single length / height (cm)	25.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	25.0
DUN14 (outer)	05025768593767
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	20.0
Packaging outer depth (cm)	25.0

Safety data

Optimal operating condition (°C)	25-25
----------------------------------	-------

PHOTOMETRY

Ascent 150 II Wallwasher ASCENT 150 II WW 3600 3K STD 2059376

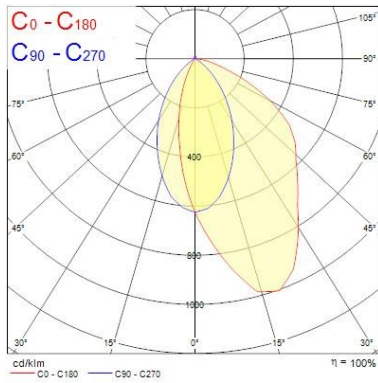

TECHNICAL DRAWINGS

