



Features

- START Panel IP54 is a range of recessed integrated LED panels for general indoor lighting applications such as breakout areas, offices and meeting rooms. With the help of DIP Switch multiple lumen outputs can be set up in 8 steps (13W 1500lm, 16W 1975lm, 19W 2375lm, 23W 2850lm, 25W 3050lm, 29W 3500lm, 32W 3850lm, 36W 4350lm). Max. drive current: 165mA; Max. power: 36W; Average lifespan: 100.000Hrs; 3000K; CRI 80; Efficacy up to: 121Lm/W; Fixture lumen up to: 4350lm; Glare control <19; IK03; IP54 (from the front); Class II


Product Overview

| | |
|--|--|
| Product name | START PANEL IP54 MLTPWR U19 600 4350LM 830 |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Steel |
| Mount | Ceiling recessed mounting |
| General application | Education, Office |
| ETIM Class | EC002892 |
| E-number FI | 4276987 |
| Fixture luminous flux (lm) | 4350 |
| Luminaire efficacy (lm/W) | 121 |
| Colour temperature (K) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Beam Angle (°) | 90 |
| Glare control | < 19 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 36 |
| Electrical protection | Class II |
| Control gear type | Electronic ballast multiwatt |

START PANEL IP54 MLTPWR U19 600 4350LM 830 0047992

| | |
|---------------------|----------------------------------|
| Dimmable | No |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | RAL 9016 - Traffic white / Bezel |
| IP rating | IP54/20 |
| IK rating | IK03 |
| Product EAN number | 5410288479927 |
| Warranty | 5 years |
| Dimming method | N/A |

Photometry

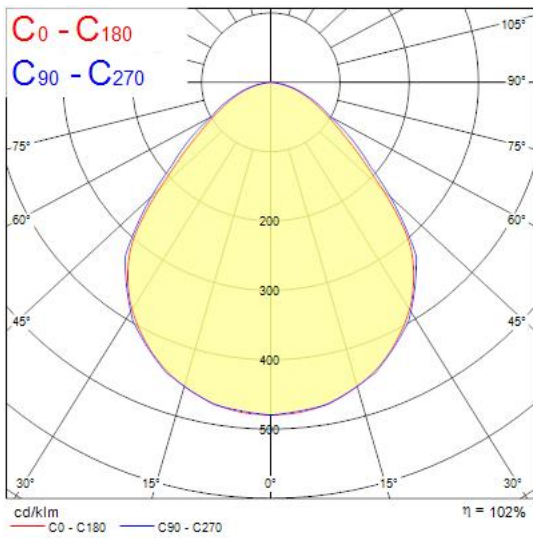

Technical drawings

