


Syl-lighter LED II 220

SYL-LIGHTER II 220 21W WW 1-10V
3031853



Product features

- Ceiling recessed IP44 from the front LED downlight, perfect where limited ceiling void is available with only 60mm product depth and 205mm cutout. Ideal replacement for 1x42W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Die-cast aluminium body, 1986LM, 21W, 95lm/W, 3000K, Driver Current: 600mA, CRI80, 74° beam angle, 1-10V dimmable LED driver (TCI 125421), IP44 from the front, IK07, (HxW) 60x205mm, 0.60kg, RAL9003, Class 2, 220-240V,

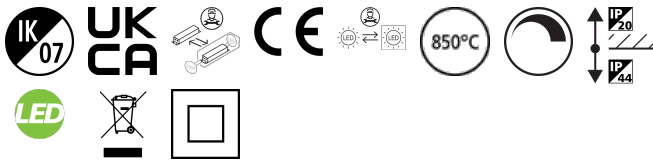


PRODUCT OVERVIEW

| | |
|-----------------------------|---------------------------------|
| Product name | SYL-LIGHTER II 220 21W WW 1-10V |
| Technology | LED |
| Housing | Aluminium |
| Mount | Ceiling recessed mounting |
| Fixture rating | Enclosed |
| Environment | Interior |
| General application | Hospitality |
| ETIM Class | EC001744 |
| E-number FI | 4270327 |
| E-number SE | 7470953 |
| Warranty | 5 years |
| Fixture luminous flux (lm) | 1986 |
| Luminaire efficacy (lm/W) | 95 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 80 |
| Colour Consistency (SDCM) | 5 |
| Beam Angle (°) | 74 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 21 |
| Electrical protection | Class II |
| Control gear type | Other |
| Control gear mounting | Remote |
| Dimmable | Yes |
| Dimming method | 1-10V (Analogue) |
| Minimum dimming level (%) | 1 |
| Housing colour | RAL 9003 - Signal white |
| IP rating | IP44/20 |
| IK rating | IK07 |
| Product EAN number | 8711971318538 |

Syl-lighter LED II 220 SYL-LIGHTER II 220 21W WW 1-10V 3031853

PHOTOMETRY

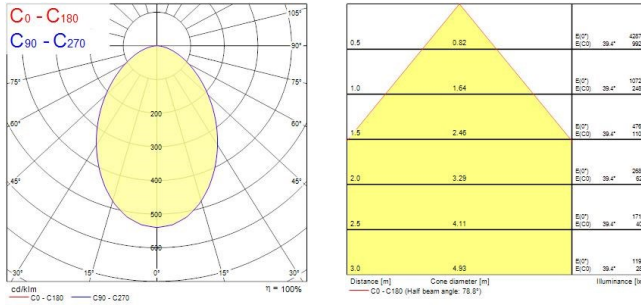

TECHNICAL DRAWINGS

