

## INSAVER SLIM 205/225 MULTIPOWER


*Insaver Slim IP44 205 Multi650-2050 840*

0030551



### Product features

- Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 4000K; UGR <19 with shallow product depth 60mm. The range features a multipower functionality where the luminous flux of the luminaire can be tailored to local needs by only setting a quick selector switch on the driver. 8 steps available with adjustable lumen output of 650 - 2050lm at 4000K. Meets TP(a) requirements.

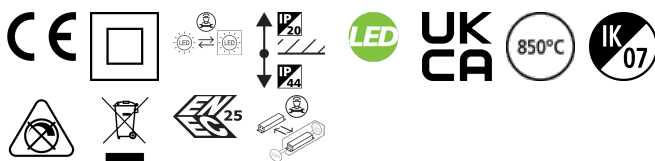


### PRODUCT OVERVIEW

|                                 |   |
|---------------------------------|---|
| Product name                    | Insaver Slim IP44 205 Multi650-2050 840 |
| Technology                      | LED                                     |
| Cap/Base                        | N/A                                     |
| Housing                         | Aluminium                               |
| Mount                           | Ceiling recessed mounting               |
| General application             | Hospitality, Office, Retail             |
| ETIM Class                      | EC001744                                |
| E-number FI                     | 4278528                                 |
| Warranty                        | 5 years                                 |
| Fixture luminous flux (lm)      | 2050                                    |
| Luminaire efficacy (lm/W)       | 128                                     |
| Colour temperature (K)          | 4000                                    |
| Light colour                    | Neutral White                           |
| CRI (Ra)                        | 80                                      |
| Colour Variation Initial (SDCM) | SDCM3                                   |
| Beam Angle (°)                  | 70                                      |
| Glare control                   | < 19                                    |
| Photobiological Risk Group      | RG1                                     |
| Total power consumption (W)     | 16                                      |
| Electrical protection           | Class II                                |
| Control gear type               | LED driver constant current             |
| Dimmable                        | No                                      |
| Dimming method                  | N/A                                     |
| LED Flickering Rate             | Ultra low (5% or less)                  |
| Housing colour                  | RAL 9003 - Signal white                 |
| IP rating                       | IP44/20                                 |
| IK rating                       | IK07                                    |
| Product EAN number              | 5410288305516                           |

### PHOTOMETRY

## INSAVER SLIM 205/225 MULTIPOWER

*Insaver Slim IP44 205 Multi650-2050 840*  
0030551

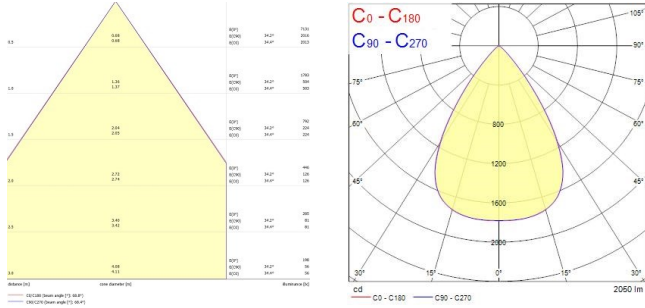

## TECHNICAL DRAWINGS

