## Equinox EQUINOX 165 2300 930 DALI 2059948

#### **Product features**



Equinox is an elegant and innovative luminaire designed using the latest optical technology. It is a high quality and efficient lighting solution for office, hospitality, and retail environments. It creates inspirational halo effects regulated by a unique adjustable optic system. It is DALI dimmable downlight luminaire, Colour rendering index Ra >90, Colour temperature: 3000K Warm White, Class II, Cut out dimensions: 165mm. Low Glare UGR<19.
















### PRODUCT OVERVIEW

Technology  Cap/Base  N/A  Housing  Aluminium  Mount  Ceiling recessed mounting  General application  ETIM Class  EC001744  Warranty  5 years  Fixture luminous flux (Im)  Luminaire efficacy (Im/W)  115  Colour temperature (K)  3000  Light colour  Warm White  CRI (Ra)  Colour Variation Initial (SDCM)  SDCM3
Housing Aluminium  Mount Ceiling recessed mounting  General application Office  ETIM Class EC001744  Warranty 5 years  Fixture luminous flux (Im) 2300  Luminaire efficacy (Im/W) 115  Colour temperature (K) 3000  Light colour Warm White  CRI (Ra) 90
Mount Ceiling recessed mounting General application Office ETIM Class EC001744 Warranty 5 years Fixture luminous flux (Im) 2300 Luminaire efficacy (Im/W) 115 Colour temperature (K) 3000 Light colour Warm White CRI (Ra) 90
General application         Office           ETIM Class         EC001744           Warranty         5 years           Fixture luminous flux (Im)         2300           Luminaire efficacy (Im/W)         115           Colour temperature (K)         3000           Light colour         Warm White           CRI (Ra)         90
ETIM Class EC001744  Warranty 5 years  Fixture luminous flux (Im) 2300  Luminaire efficacy (Im/W) 115  Colour temperature (K) 3000  Light colour Warm White  CRI (Ra) 90
Warranty 5 years  Fixture luminous flux (Im) 2300  Luminaire efficacy (Im/W) 115  Colour temperature (K) 3000  Light colour Warm White  CRI (Ra) 90
Fixture luminous flux (Im) 2300  Luminaire efficacy (Im/W) 115  Colour temperature (K) 3000  Light colour Warm White  CRI (Ra) 90
Luminaire efficacy (Im/W) 115  Colour temperature (K) 3000  Light colour Warm White  CRI (Ra) 90
Colour temperature (K) 3000 Light colour Warm White CRI (Ra) 90
Light colour Warm White CRI (Ra) 90
<b>CRI (Ra)</b> 90
` '
Colour Variation Initial (SDCM) SDCM2
Colour Variation Initial (SDCM) SDCMS
Colour Consistency (SDCM) 3
Beam Angle (°) 64
Glare control < 19
Photobiological Risk Group RG1
Total power consumption (W) 20
Electrical protection Class II
Control gear type LED driver constant current
Control gear mounting Remote
<b>Dimmable</b> Yes
Dimming method DALI, Switch-dim (mains-rated)
Minimum dimming level (%)
Housing colour RAL 9016 - Traffic white / Bezel
IP rating IP20
IK rating IK02
<b>Product EAN number</b> 5025768599486

# Equinox EQUINOX 165 2300 930 DALI 2059948

### **PHOTOMETRY**

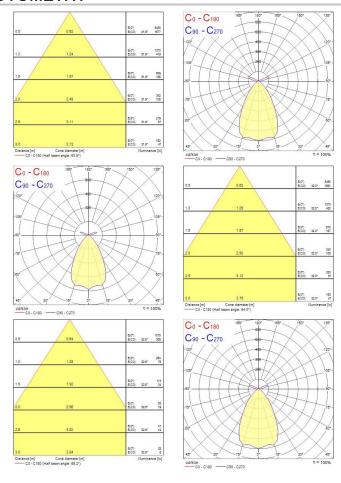

### **TECHNICAL DRAWINGS**

