

OptiClip 1200x300

OptiClip 1200 4000K C8 2L HO WH DALI WHITE

0043003



Product features

- OPTICLIP 1200 2L 4000K C8 HO WH DALI WHITE is a high efficacy low glare luminaire with replaceable light engines for office and education applications. Ceiling recessed LED luminaire with white colour plastic optic, direct light distribution, luminaire dimensions: 1195x295x20mm, Sylvania White body colour (RAL9016), IP40 (from the front), IK07, DALI Dimmable, low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 4500lm luminous flux, 34W power consumption, 132lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<18, Luminance at 65° < 2000 cd/m2, lifespan: 62,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.



PRODUCT OVERVIEW

Product name	OptiClip 1200 4000K C8 2L HO WH DALI WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	132
Colour temperature (K)	4000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	80
Glare control	< 18
Photobiological Risk Group	RG1
Total power consumption (W)	34
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5410288430034

OptiClip 1200x300

OptiClip 1200 4000K C8 2L HO WH DALI WHITE

0043003

DATA TABLE

General data

Product name	OptiClip 1200 4000K C8 2L HO WH DALI WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
Operating temperature range (°C)	-20°C...+25°C
Performance ambient temperature T _q (°C)	25
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	132
Colour temperature (K)	4000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Luminous Intensity (cd)	2668
Beam Angle (°)	80
Distribution type	Symmetric
Glare control	< 18
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	34
Mains voltage (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	15
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Transformer required	No
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	950
Inrush Current (A)	23
Inrush Duration (µs)	200
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	E, E(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz

OptiClip 1200x300

OptiClip 1200 4000K C8 2L HO WH DALI WHITE

0043003

LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	23
Max. Luminaires per 13A C Breaker	31
Max. Luminaires per 16A C Breaker	38
Max. Luminaires per 20A C Breaker	48
Max. Luminaires per 10A B Breaker	14
Max. Luminaires per 13A B Breaker	19
Max. Luminaires per 16A B Breaker	23
Max. Luminaires per 20A B Breaker	29

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	62500

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1193
Nominal Product Width (mm)	293
Nominal Product Height (mm)	20
Weight (kg)	2.8

Packaging

Single packaging type	Carton
Product EAN number	5410288430034
Packaging single length / height (cm)	120.0
Packaging single width (cm)	4.0
Packaging single depth (cm)	30.0
DUN14 (outer)	05410288430034
Units per outer package	1
Packaging outer length / height (cm)	120.0
Packaging outer width (cm)	4.0
Packaging outer depth (cm)	30.0

Safety data

Optimal operating condition (°C)	-20-25
----------------------------------	--------

PHOTOMETRY


OptiClip 1200x300

OptiClip 1200 4000K C8 2L HO WH DALI WHITE
0043003

0.5	0.84 0.81	E(0°) 10996 E(C90) 2421 E(C0) 2527
1.0	1.67 1.62	E(0°) 2674 E(C90) 605 E(C0) 632
1.5	2.51 2.43	E(0°) 1158 E(C90) 269 E(C0) 281
2.0	3.34 3.24	E(0°) 658 E(C90) 191 E(C0) 198
2.5	4.18 4.05	E(0°) 428 E(C90) 97 E(C0) 101
3.0	5.02 4.86	E(0°) 297 E(C90) 67 E(C0) 70

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 78.0°)
— C90 - C270 (Half beam angle: 79.8°)

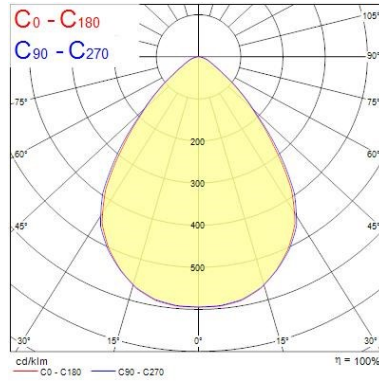

TECHNICAL DRAWINGS

