


## Quadro UGR16 600x600 SylSmart StandAlone QUADRO UGR16 600x600 4600LM 840 SSC 0047027



### Product features

- Unique stylish recessed modular Led luminaire, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Steel frame with integrated reflector, passive cooling. Low glaring UGR<16. RG1, 75 degree beam angle, optical system: white painted reflector with total internal reflection lenses. Light color temperature: 4000K Neutral White, total system power: 36W, total fixture output: 4600lm, efficacy: 128 lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 77,000 hours at 80% of the original output (L80B20), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, SylSmart SSC dimmable driver, electrical protection: Class I. Degree of Protection: IP40/IP20, suitable for indoor environment only. Not compatible with surface mounting frames. Nominal size: 595x595mm, Loop in / loop out wiring, safety cables included, 18mm nominal height, RAL 9003 - Signal white color frame, weight: 4,8Kg.

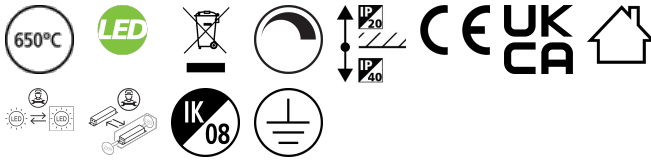

### PRODUCT OVERVIEW

Product name	QUADRO UGR16 600x600 4600LM 840 SSC
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	4600
Luminaire efficacy (lm/W)	128
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	75
Glare control	< 16
Photobiological Risk Group	RG1
Max load (A)	0.23
Total power consumption (W)	36
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSC
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK08
Product EAN number	5410288470276

## Quadro UGR16 600x600 SylSmart StandAlone

QUADRO UGR16 600x600 4600LM 840 SSC  
0047027

### DATA TABLE

#### General data

Product name	QUADRO UGR16 600x600 4600LM 840 SSC
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
Operating temperature range (°C)	-10°C...+35°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

#### Optical data

Fixture luminous flux (lm)	4600
Luminaire efficacy (lm/W)	128
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	75
Distribution type	Symmetric
Glare control	< 16
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

#### Electrical data

Max load (A)	0.23
Total power consumption (W)	36
Mains voltage (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	9.0
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>100000
Transformer required	No
Dimmable	Yes
Dimming method	SylSmart SSC
Minimum dimming level (%)	1
Drive current (mA)	155
Inrush Current (A)	40
Inrush Duration (µs)	150

## Quadro UGR16 600x600 SylSmart StandAlone QUADRO UGR16 600x600 4600LM 840 SSC 0047027

Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	38
Max. Luminaires per 13A C Breaker	48
Max. Luminaires per 16A C Breaker	60
Max. Luminaires per 20A C Breaker	75
Max. Luminaires per 10A B Breaker	32
Max. Luminaires per 13A B Breaker	41
Max. Luminaires per 16A B Breaker	52
Max. Luminaires per 20A B Breaker	64

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	77000

### Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	None
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	18.8
Weight (kg)	3.4

### Packaging


Single packaging type	Carton
Product EAN number	5410288470276
Packaging single length / height (cm)	60.0
Packaging single width (cm)	60.0
Packaging single depth (cm)	8.0
DUN14 (outer)	05410288470276
Units per outer package	1
Packaging outer length / height (cm)	60.0
Packaging outer width (cm)	60.0
Packaging outer depth (cm)	8.0

### Safety data

Optimal operating condition (°C)	-10-35
----------------------------------	--------

## PHOTOMETRY

## Quadro UGR16 600x600 SylSmart StandAlone QUADRO UGR16 600x600 4600LM 840 SSC 0047027

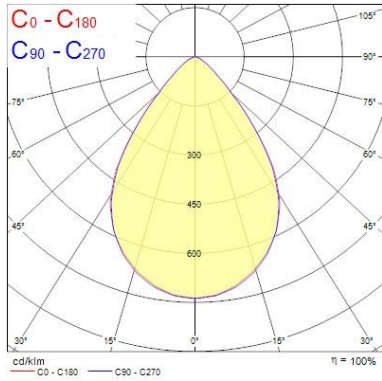

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)	Illuminance [lx]
0.5	0.74 0.75	15466	35.5° 3504	35.7° 3504	
1.0	1.48 1.49	3374	35.5° 881	35.7° 679	
1.5	2.22 2.24	1500	35.5° 392	35.7° 309	
2.0	2.96 2.98	844	35.5° 232	35.7° 219	
2.5	3.70 3.73	540	35.5° 141	35.7° 142	
3.0	4.44 4.47	375	35.5° 98	35.7° 97	

Distance [m]      Cone diameter [m]      Illuminance [lx]  
 — C0 - C180 (Half beam angle: 73.4°)      — C90 - C270 (Half beam angle: 73.0°)

### TECHNICAL DRAWINGS

