


## Quadro UGR16 600x600 SylSmart StandAlone

QUADRO UGR16 600x600 4450LM 830 SSC  
0047026



### Product features

- Unique stylish recessed modular Led luminaire, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Steel frame with integrated reflector, passive cooling. Low glaring UGR<16. RG1, 75 degree beam angle, optical system: white painted reflector with total internal reflection lenses. Light color temperature: 3000K Warm White, total system power: 36W, total fixture output: 4450lm, efficacy: 124 lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 77,000 hours at 80% of the original output (L80B20), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, SylSmart SSC dimmable driver, electrical protection: Class I. Degree of Protection: IP40/IP20, suitable for indoor environment only. Not compatible with surface mounting frames. Nominal size: 595x595mm, Loop in / loop out wiring, safety cables included, 18mm nominal height, RAL 9003 - Signal white color frame, weight: 4,8Kg.

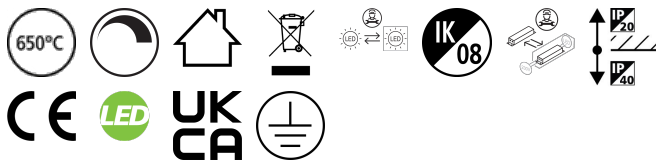

### PRODUCT OVERVIEW

Product name	QUADRO UGR16 600x600 4450LM 830 SSC
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	4450
Luminaire efficacy (lm/W)	124
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	75
Glare control	< 16
Photobiological Risk Group	RG1
Max load (A)	0.23
Total power consumption (W)	36
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSC
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK08
Product EAN number	5410288470269

## Quadro UGR16 600x600 SylSmart StandAlone

QUADRO UGR16 600x600 4450LM 830 SSC  
0047026

### DATA TABLE

#### General data

Product name	QUADRO UGR16 600x600 4450LM 830 SSC
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
Operating temperature range (°C)	-10°C...+35°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

#### Optical data

Fixture luminous flux (lm)	4450
Luminaire efficacy (lm/W)	124
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	75
Distribution type	Symmetric
Glare control	< 16
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

#### Electrical data

Max load (A)	0.23
Total power consumption (W)	36
Mains voltage (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	9.0
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>100000
Transformer required	No
Dimmable	Yes
Dimming method	SylSmart SSC
Minimum dimming level (%)	1
Drive current (mA)	155
Inrush Current (A)	40
Inrush Duration (µs)	150

## Quadro UGR16 600x600 SylSmart StandAlone QUADRO UGR16 600x600 4450LM 830 SSC 0047026

Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	38
Max. Luminaires per 13A C Breaker	48
Max. Luminaires per 16A C Breaker	60
Max. Luminaires per 20A C Breaker	75
Max. Luminaires per 10A B Breaker	32
Max. Luminaires per 13A B Breaker	41
Max. Luminaires per 16A B Breaker	52
Max. Luminaires per 20A B Breaker	64

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	77000

### Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	None
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	18.8
Weight (kg)	3.4

### Packaging


Single packaging type	Carton
Product EAN number	5410288470269
Packaging single length / height (cm)	60.0
Packaging single width (cm)	60.0
Packaging single depth (cm)	8.0
DUN14 (outer)	05410288470269
Units per outer package	1
Packaging outer length / height (cm)	60.0
Packaging outer width (cm)	60.0
Packaging outer depth (cm)	8.0

### Safety data

Optimal operating condition (°C)	-10-35
----------------------------------	--------

## PHOTOMETRY

## Quadro UGR16 600x600 SylSmart StandAlone QUADRO UGR16 600x600 4450LM 830 SSC 0047026

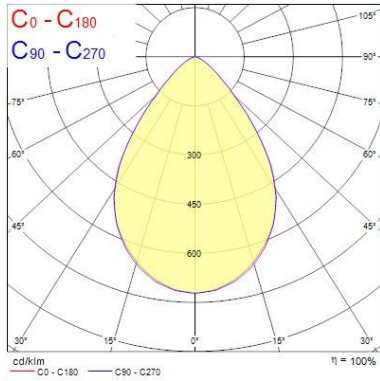

Distance [m]	Cone diameter [m]	E <sub>0</sub> ' [lx]	E <sub>1</sub> ' [lx]	E <sub>2</sub> ' [lx]
0.5	0.74 0.75	1270'	35.6"	3312
1.0	1.49 1.49	319'	35.6"	829
1.5	2.23 2.24	142'	35.6"	368
2.0	2.97 2.98	799	35.6"	207
2.5	3.71 3.73	511	35.6"	132
3.0	4.46 4.47	368	35.6"	92

Distance [m]      Cone diameter [m]      Illuminance [lx]  
 C0 - C180 (Half beam angle: 73.4°)  
 C90 - C270 (Half beam angle: 73.2°)

### TECHNICAL DRAWINGS

