

## START eco Panel 600x600

START eco Panel 600x600 3200Lm 830

0047669



### Product features

- Back lit LED panel, Low Flicker, 36 W, Warm White, 3000 K, 3200 lumens, 89 lm/W, Average lifespan: 100.000Hrs, electronic non dimmable driver. (HxWxD) 34 x 595 x 595 mm.



## PRODUCT OVERVIEW

Product name	START eco Panel 600x600 3200Lm 830
Technology	LED
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
Environment	Interior
General application	Education, Office
ETIM Class	EC002892
Warranty	3 years
Fixture luminous flux (lm)	3200
Luminaire efficacy (lm/W)	89
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	112
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK02
Product EAN number	5410288476698

## DATA TABLE

### General data

Product name	START eco Panel 600x600 3200Lm 830
--------------	------------------------------------

## START eco Panel 600x600

*START eco Panel 600x600 3200Lm 830*

0047669

Technology	LED
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
Environment	Interior
General application	Education, Office
Operating temperature range (°C)	-10°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	3 years

### Optical data

Fixture luminous flux (lm)	3200
Luminaire efficacy (lm/W)	89
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	112
Distribution type	Symmetric
Glare control	< 22
Photobiological Risk Group	RG0

### Electrical data

Total power consumption (W)	36
Mains voltage (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	15.0
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	750
Inrush Current (A)	14.6
Inrush Duration (µs)	200
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	45
Max. Luminaires per 13A C Breaker	60
Max. Luminaires per 16A C Breaker	74
Max. Luminaires per 20A C Breaker	93

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	71000

## START eco Panel 600x600

START eco Panel 600x600 3200Lm 830  
0047669

### Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK02
Diffuser material	Other
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	34
Weight (kg)	1.538


### Packaging

Single packaging type	Carton
Product EAN number	5410288476698
Packaging single length / height (cm)	60.0
Packaging single width (cm)	3.8
Packaging single depth (cm)	64.5
DUN14 (outer)	15410288476695
Units per outer package	4
Packaging outer length / height (cm)	69.5
Packaging outer width (cm)	17.5
Packaging outer depth (cm)	65.0

### Safety data

Optimal operating condition (°C)	-10-45
----------------------------------	--------

## PHOTOMETRY

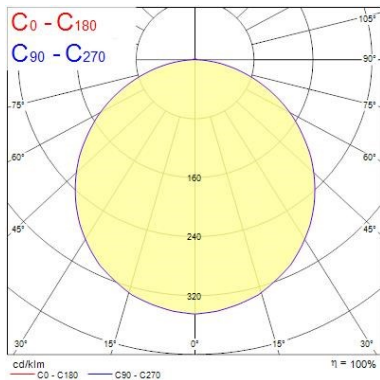

Distance [m]	Cone diameter [m]	Beam type	Beam angle [°]	Illuminance [lx]
0.5	1.48	C0-C180	112.0°	4347
1.0	2.97	C0-C180	112.0°	1087
1.5	4.45	C0-C180	112.0°	483
2.0	5.93	C0-C180	112.0°	272
2.5	7.41	C0-C180	112.0°	174
3.0	8.90	C0-C180	112.0°	121

Distance [m] Cone diameter [m]  
C0 - C180 (Half beam angle: 112.0°) Illuminance [lx]

## TECHNICAL DRAWINGS

## START eco Panel 600x600

*START eco Panel 600x600 3200Lm 830*

0047669

