

## START eco Panel 1200x300

START eco Panel 1200x300 3200Lm 840 LILO

0047072



### Product features

- Back lit LED panel, Low Flicker, 36 W, Neutral White, 4000 K, 3200 lumens, 89 lm/W, Average lifespan: 100.000Hrs, electronic non dimmable driver. (HxWxD) 34 x 1195 x 295 mm. Loop in loop out box allows for quick installation.




## PRODUCT OVERVIEW

|                                 |  |
|---------------------------------|--|
| Product name                    | START eco Panel 1200x300 3200Lm 840 LILO |
| Technology                      | LED                                      |
| Housing                         | Aluminium, Steel                         |
| Mount                           | Ceiling recessed mounting                |
| Environment                     | Interior                                 |
| General application             | Education, Office                        |
| ETIM Class                      | EC002892                                 |
| Warranty                        | 3 years                                  |
| Fixture luminous flux (lm)      | 3200                                     |
| Luminaire efficacy (lm/W)       | 89                                       |
| Colour temperature (K)          | 4000                                     |
| Light colour                    | Neutral White                            |
| CRI (Ra)                        | 80                                       |
| Colour Variation Initial (SDCM) | SDCM6                                    |
| Beam Angle (°)                  | 112                                      |
| Glare control                   | < 22                                     |
| Photobiological Risk Group      | RG0                                      |
| Total power consumption (W)     | 36                                       |
| Electrical protection           | Class II                                 |
| Control gear type               | LED driver constant current              |
| Dimmable                        | No                                       |
| Dimming method                  | N/A                                      |
| LED Flickering Rate             | Ultra low (5% or less)                   |
| Housing colour                  | RAL 9003 - Signal white                  |
| IP rating                       | IP40/20                                  |
| IK rating                       | IK02                                     |
| Product EAN number              | 5410288470726                            |

## PHOTOMETRY

## START eco Panel 1200x300

START eco Panel 1200x300 3200Lm 840 LILO  
0047072

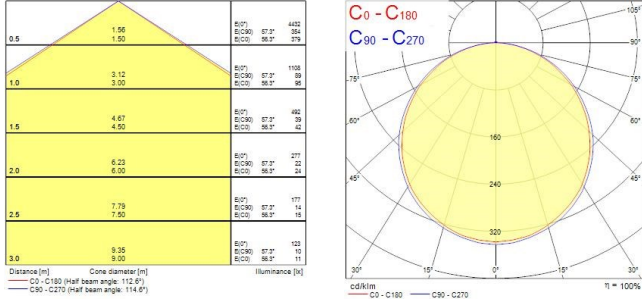

## TECHNICAL DRAWINGS

