

START Panel IP54 600x600

START PANEL IP54 600 4750LM 840 DALI
0047783



Product features

- START Panel IP54 is a range of recessed integrated LED panels for general indoor lighting applications such as breakout areas, offices and meeting rooms. Max. drive current: 165mA; Max. power: 35W; Average lifespan: 100.000Hrs; 4000K; CRI 80; Efficacy up to: 146Lm/W; Fixture lumen up to: 5100lm; IK03; IP54 (from the front); Class II; DALI dimmable.



PRODUCT OVERVIEW

Product name	START PANEL IP54 600 4750LM 840 DALI
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
E-number FI	4274193
Warranty	5 years
Fixture luminous flux (lm)	4750
Luminaire efficacy (lm/W)	130
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	107
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP54/20
IK rating	IK03
Product EAN number	5410288477831

START Panel IP54 600x600

START PANEL IP54 600 4750LM 840 DALI
0047783

DATA TABLE

General data

Product name	START PANEL IP54 600 4750LM 840 DALI
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4274193
Warranty	5 years

Optical data

Fixture luminous flux (lm)	4750
Luminaire efficacy (lm/W)	130
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	107
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	36
Mains voltage (V)	220-240V
Lamp power factor	0.96
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	16.0
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>100000
Transformer required	No
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	150
Inrush Current (A)	25
Inrush Duration (µs)	177
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz

START Panel IP54 600x600

START PANEL IP54 600 4750LM 840 DALI
0047783

LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	38
Max. Luminaires per 13A C Breaker	48
Max. Luminaires per 16A C Breaker	60
Max. Luminaires per 20A C Breaker	75
Max. Luminaires per 16A B Breaker	21

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	71000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP54/20
IK rating	IK03
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	65
Weight (kg)	2.89

Packaging

Single packaging type	Carton
Product EAN number	5410288477831
Packaging single length / height (cm)	61.5
Packaging single width (cm)	61.0
Packaging single depth (cm)	7.5
DUN14 (outer)	05410288477831
Units per outer package	20
Packaging outer length / height (cm)	125.0
Packaging outer width (cm)	81.0
Packaging outer depth (cm)	63.0

Safety data

Optimal operating condition (°C)	-10-40
----------------------------------	--------


PHOTOMETRY

START Panel IP54 600x600 START PANEL IP54 600 4750LM 840 DALI 0047783

0.5	1.44 1.51	E(0°) E(C90) E(C0)	8711 826 569
1.0	2.88 3.01	E(0°) E(C90) E(C0)	1678 156 142
1.5	4.32 4.52	E(0°) E(C90) E(C0)	746 69 63
2.0	5.76 6.02	E(0°) E(C90) E(C0)	419 39 36
2.5	7.19 7.53	E(0°) E(C90) E(C0)	268 25 23
3.0	8.63 9.03	E(0°) E(C90) E(C0)	186 17 16

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 112.6°)
— C90 - C270 (Half beam angle: 110.4°)

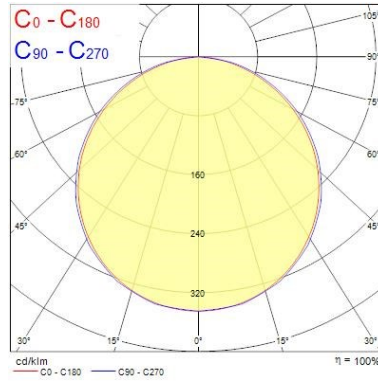

TECHNICAL DRAWINGS

