


## OptiClip 600x600

OptiClip 600 4000K C8 WH SSA02 WHITE

0044003

### Product features

- OPTICLIP 600 4000K C8 WH SSA02 WHITE is a high efficacy low glare luminaire with replaceable light engines for office and education applications. Ceiling recessed LED luminaire with white colour plastic optic, direct light distribution, luminaire dimensions: 595x595x52mm, Sylvania White body colour (RAL9016), IP40 (from the front), IK07, SylSmart Connected capable, low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 3300lm luminous flux, 27W power consumption, 122lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<17, Luminance at 65° < 2000 cd/m2, lifespan: 62,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.

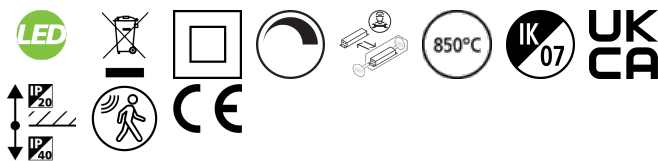

### PRODUCT OVERVIEW

Product name	OptiClip 600 4000K C8 WH SSA02 WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	3300
Luminaire efficacy (lm/W)	122
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	80
Glare control	< 17
Photobiological Risk Group	RG1
Total power consumption (W)	27
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSA
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5410288440033

## OptiClip 600x600

*OptiClip 600 4000K C8 WH SSA02 WHITE*

0044003

### DATA TABLE

#### General data

Product name	OptiClip 600 4000K C8 WH SSA02 WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
Operating temperature range (°C)	-20°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

#### Optical data

Fixture luminous flux (lm)	3300
Luminaire efficacy (lm/W)	122
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Luminous Intensity (cd)	1926
Beam Angle (°)	80
Distribution type	Symmetric
Glare control	< 17
Photobiological Risk Group	RG1

#### Electrical data

Total power consumption (W)	27
Mains voltage (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	10
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Transformer required	No
Dimmable	Yes
Dimming method	SylSmart SSA
Minimum dimming level (%)	1
Drive current (mA)	700
Inrush Current (A)	30
Inrush Duration (µs)	200
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	E, E(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz

## OptiClip 600x600

*OptiClip 600 4000K C8 WH SSA02 WHITE*  
0044003

LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	21
Max. Luminaires per 13A C Breaker	27
Max. Luminaires per 16A C Breaker	33
Max. Luminaires per 20A C Breaker	42
Max. Luminaires per 10A B Breaker	12
Max. Luminaires per 13A B Breaker	16
Max. Luminaires per 16A B Breaker	20
Max. Luminaires per 20A B Breaker	25

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	62500

### Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	52
Weight (kg)	3.5

### Packaging

Single packaging type	Carton
Product EAN number	5410288440033
Packaging single length / height (cm)	62.0
Packaging single width (cm)	6.5
Packaging single depth (cm)	65.0
DUN14 (outer)	05410288440033
Units per outer package	1
Packaging outer length / height (cm)	62.0
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	65.0

### Safety data

Optimal operating condition (°C)	-20-25
----------------------------------	--------

## PHOTOMETRY


## OptiClip 600x600

OptiClip 600 4000K C8 WH SSA02 WHITE  
0044003

0.5	0.85 0.83	E(0°) 7706 E(C90) 1726 E(C0) 1782
1.0	1.69 1.65	E(0°) 1926 E(C90) 431 E(C0) 441
1.5	2.54 2.48	E(0°) 558 E(C90) 192 E(C0) 196
2.0	3.38 3.31	E(0°) 452 E(C90) 108 E(C0) 110
2.5	4.23 4.14	E(0°) 308 E(C90) 69 E(C0) 71
3.0	5.07 4.96	E(0°) 214 E(C90) 48 E(C0) 48

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 75.2°)  
— C90 - C270 (Half beam angle: 90.4°)

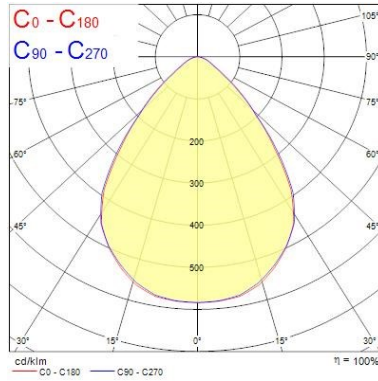

## TECHNICAL DRAWINGS

