


## START Flex Low Output

START Flex IP20 830 2800lm  
0068100



### Product features

- 5 metre IP20 LED reel with pre-attached 3M adhesive type; equipped with 300 LEDs; 2800lm per 5m (560lm per 1m); 24V; 3000K; CRI80; SDCM 3; Compatible with emergency packs: 0046600, 0046601

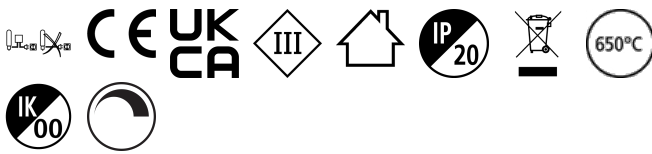

## PRODUCT OVERVIEW

Product name	START Flex IP20 830 2800lm
Technology	LED
Mount	Other
General application	Hospitality, Retail
ETIM Class	EC002706
E-number FI	4276594
Warranty	5 years
Fixture luminous flux (lm)	2800
Luminaire efficacy (lm/W)	117
Colour temperature (K)	3000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Beam Angle (°)	N/A
Photobiological Risk Group	RG1
Total power consumption (W)	24
Electrical protection	Class III
Dimmable	Yes
Dimming method	Other
IP rating	IP20
IK rating	IK00
Product EAN number	5410288681009



## PHOTOMETRY

## START Flex Low Output START Flex IP20 830 2800lm 0068100

0.5	1.44 1.61	E:0° E:C90° E:C0°	182 173 86
1.0	2.88 3.21	E:0° E:C90° E:C0°	188 165 14
1.5	4.32 4.82	E:0° E:C90° E:C0°	84 7 6
2.0	5.76 6.43	E:0° E:C90° E:C0°	47 4 3
2.5	7.18 8.03	E:0° E:C90° E:C0°	30 3 2
3.0	8.63 9.64	E:0° E:C90° E:C0°	21 2 1

Distance [m]      Core diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 116.4°)  
— C90 - C270 (Half beam angle: 110.4°)

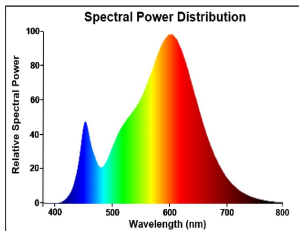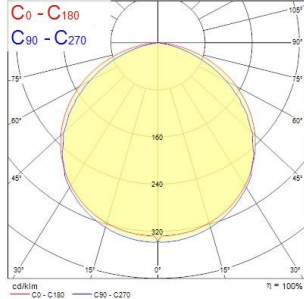

## TECHNICAL DRAWINGS

