

## Flex Pro Low Output Flex Pro IP20 2450lm 930 0068168



### Product features

- 5 metre IP20 LED reel with pre-attached 3M adhesive type; equipped with 300 LEDs; 2450lm per 5m (490lm per 1m); 24V; 3000K; CRI90; R9>50; SDCM 3, Compatible with emergency packs: 0046600, 0046601



### PRODUCT OVERVIEW

Product name	Flex Pro IP20 2450lm 930
Technology	LED
General application	Hospitality
ETIM Class	EC002706
E-number FI	4278331
Warranty	5 years
Fixture luminous flux (lm)	2450
Luminaire efficacy (lm/W)	102
Colour temperature (K)	3000
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Photobiological Risk Group	RG1
Total power consumption (W)	24
Electrical protection	Class III
Dimmable	Yes
Dimming method	Other
IP rating	IP20
IK rating	IK00
Product EAN number	5410288681689

### DATA TABLE

#### General data

Product name	Flex Pro IP20 2450lm 930
Technology	LED
General application	Hospitality
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002706
E-number FI	4278331
Warranty	5 years

## Flex Pro Low Output Flex Pro IP20 2450lm 930 0068168

### Optical data

Fixture luminous flux (lm)	2450
Luminaire efficacy (lm/W)	102
Colour temperature (K)	3000
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	24
Mains voltage (V)	24V
Electrical protection	Class III
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Dimming method	Other
Drive current (mA)	1000
Glow Wire Test (°C)	650
Lamp Energy Label (class)	F

### Lifetime data

Lifespan L70 B50	54000
Lifespan L70 B10	54000
Lifespan L80 B10	50000
Lifespan L90 B10	44000

### Physical data

IP rating	IP20
IK rating	IK00
Nominal Product Length (mm)	5000
Nominal Product Width (mm)	8
Nominal Product Height (mm)	1.2
Weight (kg)	0.1

### Packaging

Single packaging type	Carton
Product EAN number	5410288681689
Packaging single length / height (cm)	23.5
Packaging single width (cm)	22.5
Packaging single depth (cm)	3.0
DUN14 (outer)	15410288681686
Units per outer package	20
Packaging outer length / height (cm)	49.0
Packaging outer width (cm)	35.0
Packaging outer depth (cm)	24.0

## Flex Pro Low Output Flex Pro IP20 2450lm 930 0068168

### Safety data



Optimal operating condition (°C)	-20-40
----------------------------------	--------

### PHOTOMETRY


0.5	1.55 1.55	E(0°) E(C90) E(C180)	853 62 62
1.0	3.10 3.15	E(0°) E(C90) E(C180)	163 13 13
1.5	4.65 4.73	E(0°) E(C90) E(C180)	73 6 6
2.0	6.21 6.30	E(0°) E(C90) E(C180)	41 3 3
2.5	7.76 7.88	E(0°) E(C90) E(C180)	28 2 2
3.0	9.31 9.45	E(0°) E(C90) E(C180)	18 1 1

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 115.2°)  
— C90 - C270 (Half beam angle: 114.4°)

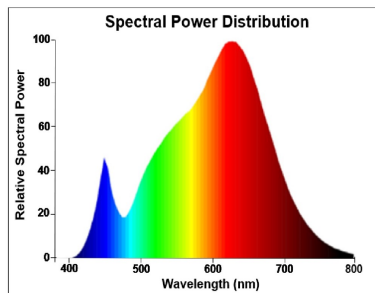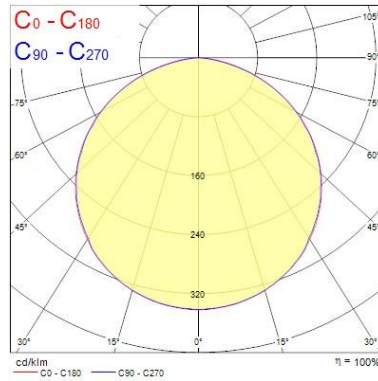


### TECHNICAL DRAWINGS



Flex Pro Low Output  
Flex Pro IP20 2450lm 930  
0068168



0068168

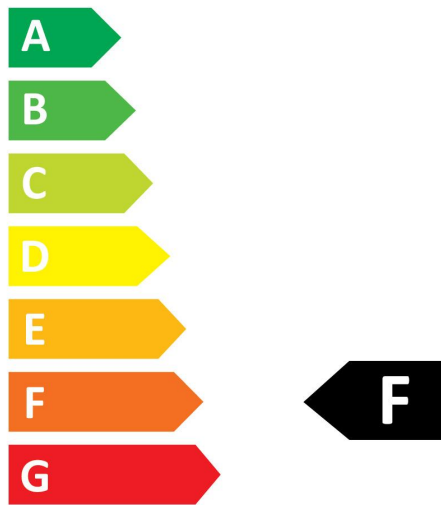

**24**  
kWh/1000h




2019/2015

# SYLVANIA

Flex Pro Low Output  
Flex Pro IP20 2450lm 930  
0068168



0068168

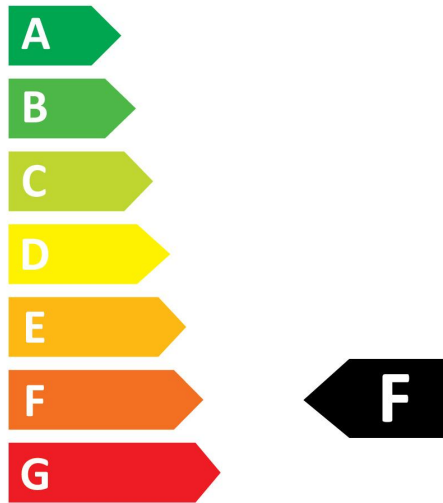

**24**  
kWh/1000h



2019/2015