


## Instar Trend 75 Swing IP44

QR-CB51 50W GU/GX5.3  
3078500



### Product features


- INSTAR TREND 75 SW COOL50 WH





## PRODUCT OVERVIEW

Product name	QR-CB51 50W GU/GX5.3
Technology	Accessory
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Residential & Consumer
ETIM Class	EC001744
E-number FI	4277783
E-number SE	7472720
E-number Norway	3217728
Warranty	2 years
Electrical protection	Class III
Control gear mounting	Remote
Housing colour	White
IP rating	IP20
Product EAN number	8711971785002

## PHOTOMETRY

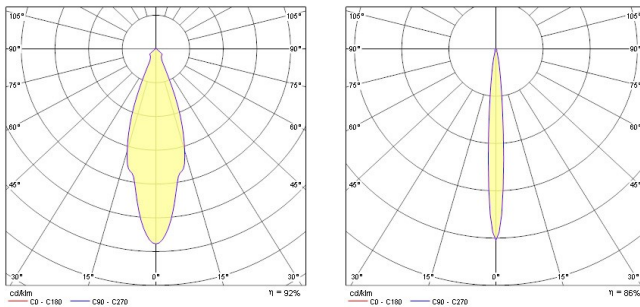

## Instar Trend 75 Swing IP44 QR-CB51 50W GU/GX5.3 3078500



Distance [m]	Cone diameter [m]	E <sub>0</sub> [lx]	E <sub>50</sub> [lx]
0.5	0.30	2996	1306
1.0	0.60	739	325
1.5	0.91	320	141
2.0	1.21	188	82
2.5	1.51	118	52
3.0	1.81	82	36


Distance [m] Cone diameter [m] Illuminance [lx]  
C180 (Half beam angle: 9.0°)

Distance [m]	Cone diameter [m]	E <sub>0</sub> [lx]	E <sub>50</sub> [lx]
0.5	0.60	3148	1384
1.0	1.16	789	341
1.5	0.24	305	135
2.0	0.31	192	83
2.5	0.39	132	58
3.0	0.47	89	41

Distance [m] Cone diameter [m] Illuminance [lx]  
C90 (Half beam angle: 9.0°)




Distance [m]	Cone diameter [m]	E <sub>0</sub> [lx]	E <sub>50</sub> [lx]
0.5	0.55	3046	1320
1.0	1.10	767	332
1.5	1.65	438	187
2.0	2.20	241	103
2.5	2.75	158	68
3.0	3.30	110	47

Distance [m] Cone diameter [m] Illuminance [lx]  
C180 (Half beam angle: 57.0°)








Distance [m]	Cone diameter [m]	E <sub>0</sub> [lx]	E <sub>50</sub> [lx]
0.5	0.30	2996	1306
1.0	0.60	739	325
1.5	0.91	320	141
2.0	1.21	188	82
2.5	1.51	118	52
3.0	1.81	82	36

Distance [m] Cone diameter [m] Illuminance [lx]  
C180 (Half beam angle: 33.0°)



## Instar Trend 75 Swing IP44 QR-CB51 50W GU/GX5.3 3078500



### TECHNICAL DRAWINGS

