


Insaver Slim IP44 DALI 225 4950lm 840
0030541



Features

- Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Dimmable DALI driver of TRIDONIC (Driver LC 45W 450-1050mA 54V o4a NF SR EXC3 875000923), 41W; 4950lm; 121lm/W; 4000K; UGR <22 with shallow product depth 65mm. Meets TP(a) requirements.


Product Overview

Product name	Insaver Slim IP44 DALI 225 4950lm 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4278537
Fixture luminous flux (lm)	4950
Luminaire efficacy (lm/W)	121
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Beam Angle (°)	NA
Glare control	< 22
Photobiological Risk Group	RG1
Total power consumption (W)	41
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes

Insaver Slim IP44 DALI 225 4950lm 840
0030541

Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288305417
Warranty	5 years
Colour Code	840
Dimming method	DALI

Photometry

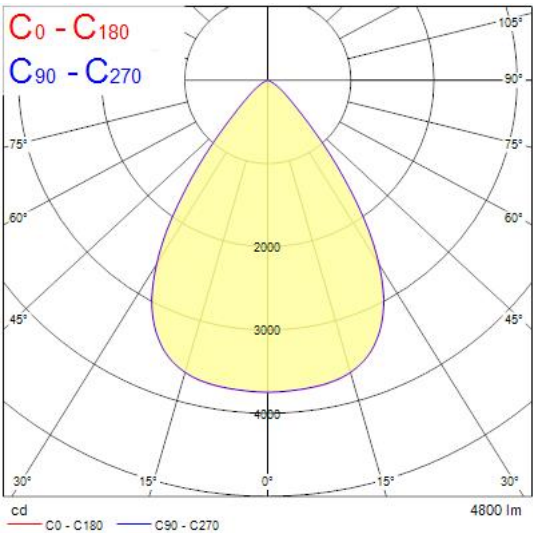

Technical drawings

