


## Syl-lighter LED II 195

SYL-LIGHTER II 195 16W NW DALI  
3031844



### Product features

- Ceiling recessed IP44 from the front LED downlight, perfect where limited ceiling void is available with only 55mm product depth and 175mm cutout. Ideal replacement for 1x32W/2x18W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Die-cast aluminium body, 1575LM, 16W, 98lm/W, 4000K, Driver Current: 400mA, CRI80, 74° beam angle, Dali dimmable LED driver (Tridonic 28000693), IP44 from the front, IK07, (HxW) 55x195mm, 0.45kg, RAL9003, Class 2, 220-240V,

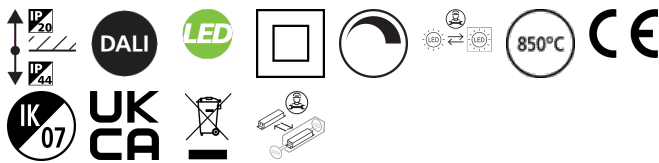


### PRODUCT OVERVIEW

Product name	SYL-LIGHTER II 195 16W NW DALI
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Environment	Interior
General application	Hospitality
ETIM Class	EC001744
E-number FI	4270279
E-number SE	7470950
Warranty	5 years
Fixture luminous flux (lm)	1575
Luminaire efficacy (lm/W)	98
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	5
Beam Angle (°)	74
Photobiological Risk Group	RG0
Total power consumption (W)	16
Electrical protection	Class II
Control gear type	Other
Control gear mounting	Remote
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	8711971318446

## Syl-lighter LED II 195 SYL-LIGHTER II 195 16W NW DALI 3031844

### PHOTOMETRY

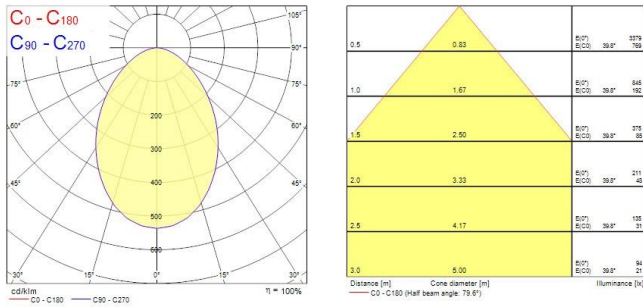

### TECHNICAL DRAWINGS

