

INSAVER SLIM IP65


Insaver Slim IP65 225 Multi4150-4950lm 840

0030533



Product features

- Insaver Slim is a ceiling recessed LED downlight (IP65 from the front and back), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 41W; 4950lm; 121lm/W; 4000K; UGR <22 with shallow product depth 65mm. IK07 for the fixture, IK03 for the IP driver box. When using with EM kit (0046600& 0046601), protection IP65 kept only from the front. Meets TP(a) requirements.

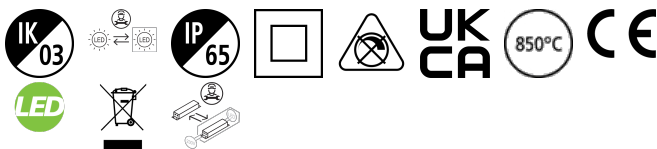


PRODUCT OVERVIEW

Product name	Insaver Slim IP65 225 Multi4150-4950lm 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4579609
Warranty	5 years
Fixture luminous flux (lm)	4950
Luminaire efficacy (lm/W)	121
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	70
Glare control	< 22
Photobiological Risk Group	RG1
Total power consumption (W)	41
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP65
IK rating	IK03
Product EAN number	5410288305332

PHOTOMETRY

INSAVER SLIM IP65
Insaver Slim IP65 225 Multi4 150-4950lm 840
0030533

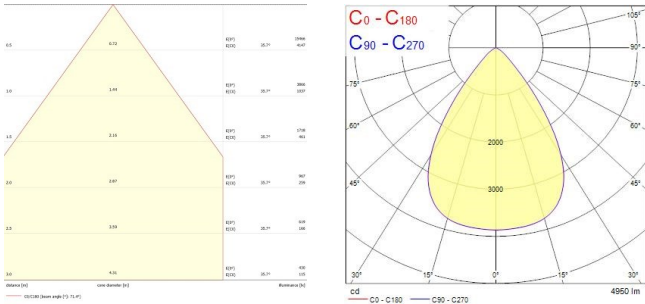

TECHNICAL DRAWINGS

