


START Downlight Flat Dimmable 226mm Round Surface

Start Downlight Flat 226 1750LM 840 DIM SM
0054129



Product features

- START Downlight Flat DIM Surface is an integrated LED surface mounted downlight with a separate, phase dimmable driver and loop in- out box, 17W; 1750Lm; 103Lm/W; 4000K; IP20.

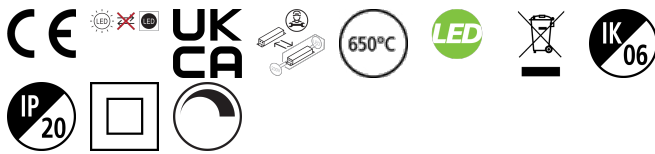

PRODUCT OVERVIEW


Product name	Start Downlight Flat 226 1750LM 840 DIM SM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
General application	Hospitality
ETIM Class	EC001744
E-number FI	4278504
Warranty	5 years
Fixture luminous flux (lm)	1750
Luminaire efficacy (lm/W)	103
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK06
Product EAN number	5410288541297

PHOTOMETRY

START Downlight Flat Dimmable 226mm Round Surface

Start Downlight Flat 226 1750LM 840 DIM SM

0054129



Distance [m]	Cone diameter [m]	Beam type	Illuminance [lx]
0.5	1.44	E0°	2607
	1.44	E(C)90	232
	1.42	E(C)0	237
1.0	2.89	E0°	657
	2.86	E(C)90	58
	2.82	E(C)0	59
1.5	4.33	E0°	279
	4.28	E(C)90	38
	4.22	E(C)0	38
2.0	5.78	E0°	187
	5.71	E(C)90	14
	5.62	E(C)0	14
2.5	7.22	E0°	100
	7.14	E(C)90	9
	7.04	E(C)0	9
3.0	8.67	E0°	70
	8.57	E(C)90	6
	8.46	E(C)0	7

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 110.0°)

— C90 - C270 (Half beam angle: 110.0°)

TECHNICAL DRAWINGS

