



Features


- A click diffuser made of acrylic thermoplastic (PMMA). Operating temperature: -20 - 70 [°C]. IK rating: 08. UV resistant. Fire hazard certificate according to IEC 60695-2-11. Compatible with the following profiles: Profile deep wide surface 30 CDE-9/T (0022599), Profile shallow wide surface 30 CDE-9/T (0022600). Transparency level 75%.

Product Overview

Product name	Cover C9 click 2m opal
Technology	Accessory
Housing	Aluminium
General application	Retail
ETIM Class	EC002557
E-number FI	4278037
Housing colour	Silver
Product EAN number	5410288226200
Warranty	3 years

Cover C9 click 2m opal
0022620

Technical drawings

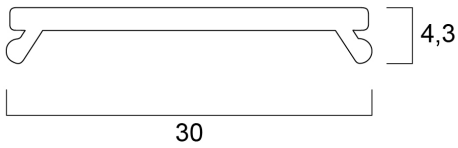

Data table

GENERAL DATA

Product name	Cover C9 click 2m opal
Technology	Accessory
Housing	Aluminium
General application	Retail
ETIM Class	EC002557
E-number FI	4278037
Warranty	3 years

ELECTRICAL DATA

Control gear required	No
-----------------------	----

PHYSICAL DATA

Housing colour	Silver
Diffuser finish	Opal
Nominal Product Length (mm)	2000

Cover C9 click 2m opal 0022620

Nominal Product Width (mm)	30
Nominal Product Height (mm)	4.3
Weight (kg)	0.04

PACKAGING

Single packaging type	Carton
Product EAN number	5410288226200
Packaging single length / height (cm)	200.0
Packaging single width (cm)	3.0
Packaging single depth (cm)	2.0
DUN14 (outer)	05410288226200
Units per outer package	100
Packaging outer length / height (cm)	205.0
Packaging outer width (cm)	16.0
Packaging outer depth (cm)	16.0

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No