


Flex Pro Low Output Flex Pro IP20 2500lm 940 0068169



Product features

- 5 metre IP20 LED reel with pre-attached 3M adhesive type; equipped with 300 LEDs; 2500lm per 5m (500lm per 1m); 24V; 4000K; CRI90; R9>50; SDCM 3; Compatible with emergency packs: 0046600, 0046601

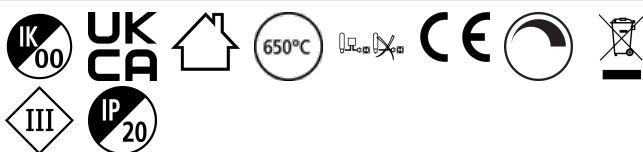

PRODUCT OVERVIEW


Product name	Flex Pro IP20 2500lm 940
Technology	LED
General application	Hospitality
ETIM Class	EC002706
E-number FI	4278332
Warranty	5 years
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	104
Colour temperature (K)	4000
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Photobiological Risk Group	RG1
Total power consumption (W)	24
Electrical protection	Class III
Dimmable	Yes
Dimming method	Other
IP rating	IP20
IK rating	IK00
Product EAN number	5410288681696

PHOTOMETRY


Distance [m]	Cone diameter [m]	E07 E17 E27	800 50 45
0.5	1.58 1.61	E07 E17 E27	164
1.0	3.16 3.23	E07 E17 E27	73 4 5
1.5	4.75 4.84	E07 E17 E27	41 3 5
2.0	6.33 6.45	E07 E17 E27	30 2 2
2.5	7.91 8.05	E07 E17 E27	19 1 1
3.0	9.48 9.68	E07 E17 E27	15 1 1

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 115.4°)
— C90 - C270 (Half beam angle: 115.4°)



Flex Pro Low Output Flex Pro IP20 2500lm 940 0068169



TECHNICAL DRAWINGS

