

### Features

- START Panel is a range of backlit LED panels used in recessed ceilings. Ideal for general indoor applications such as corridors, breakrooms, offices and meeting rooms. Luminaire dimensions are compatible with common ceiling installation, and the shallow design makes it easy to install in low ceilings. 3600Lm; 36W; 100Lm/W; Drive current: 750mA; Average lifespan: 100.000Hrs; 3000K; CRI 80; Glare control <19; IK03; IP40 (from the front); SDCM<3; Class II; Loop in loop out connector for quick installation; DALI dimmable.


### Product Overview

<b>Product name</b>	START Panel UGR19 1200x300 DALI 3600Lm 830
<b>Technology</b>	LED
<b>Housing</b>	Aluminium, Steel
<b>Mount</b>	Ceiling recessed mounting
<b>General application</b>	Education, Office
<b>ETIM Class</b>	EC002892
<b>E-number FI</b>	4278385
<b>Fixture luminous flux (lm)</b>	3600
<b>Luminaire efficacy (lm/W)</b>	100
<b>Colour temperature (K)</b>	3000
<b>Light colour</b>	Warm White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Beam Angle (°)</b>	90
<b>Glare control</b>	< 19
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	36
<b>Electrical protection</b>	Class II
<b>Control gear type</b>	LED driver constant current

## START Panel UGR19 1200x300 DALI 3600Lm 830 0042225

Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288422251
Warranty	5 years
Dimming method	DALI

### Photometry

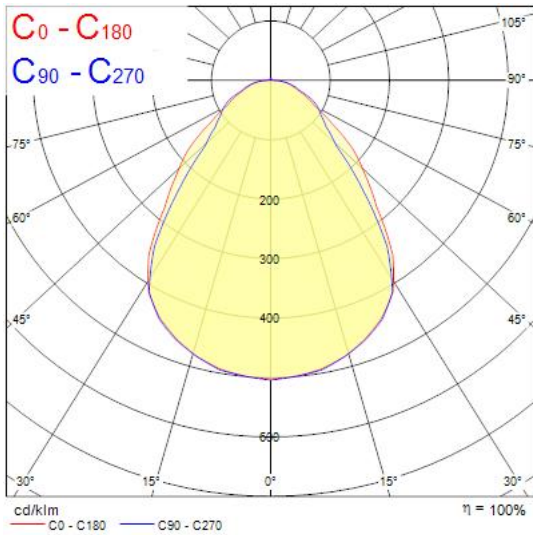

### Technical drawings

