


Insaver HO Topper LED II 225

Insaver HO Topper LED II 225 RO 25W WW

3033948

Product features

- IP44 from the front round LED downlight with outputs of up to 2,289lm and an efficacy of up to 99lm/W. Polycarbonate diffuser with a white bezel. Shallow recess depth (<65mm). Available in 12, 15, 21 & 25W in 150mm, 175mm, 205mm & 225mm cut out sizes. Perfect for up to 2x26W CFL replacement. Includes loop-in loop-out facility for quick installation.

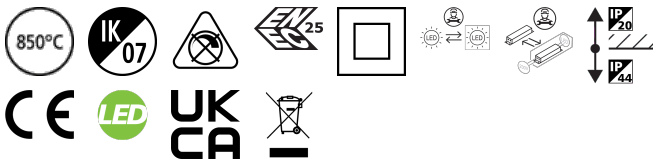

PRODUCT OVERVIEW


| | |
|---------------------------------|--|
| Product name | Insaver HO Topper LED II 225 RO 25W WW |
| Technology | LED |
| Housing | Aluminium |
| Mount | Ceiling recessed mounting |
| Environment | Interior |
| General application | Hospitality |
| ETIM Class | EC001744 |
| E-number SE | 7465636 |
| Warranty | 5 years |
| Fixture luminous flux (lm) | 2071 |
| Luminaire efficacy (lm/W) | 83 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM3 |
| Beam Angle (°) | 74 |
| Glare control | < 23 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 25 |
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| Dimmable | No |
| Dimming method | N/A |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | RAL 9003 - Signal white |
| IP rating | IP44/20 |
| IK rating | IK07 |
| Product EAN number | 8711971339489 |

PHOTOMETRY

Insaver HO Topper LED II 225

Insaver HO Topper LED II 225 RO 25W WW

3033948

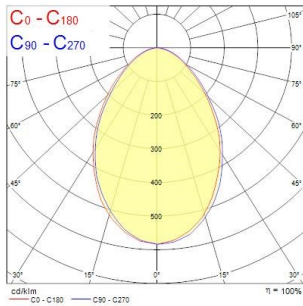

TECHNICAL DRAWINGS

