



Features

- Direct retrofit replacement for high-pressure mercury vapor lamps (HPMV)50,000 hours average rated lifetimeUp to 78% energy saving compared to the standard high-pressure mercury vapor lampsMercury-free solutionLower maintenance costHigh lumen efficacyDual operating mode – compatible with HPMV magnetic ballast and also, suitable for AC direct mains 120-240V operationHigh surge voltage protection: 4kVSuitable for both open and enclosed luminairesWide light distributionHigh switching cycles – 200,000XHigh colour rendering – CRI80Minimum and maximum operating temperature: -30°C to 50°C

Product Overview

Product name	ToLEDo Performer T85 6800LM 840 E40 SL
Technology	LED
Watt (Rated) (W)	54
Type	LED exchangeable
Cap/Base	E40
Fixture rating	Open
General application	Logistics & Industry
ETIM Class	EC001959
E-number FI	4740741
Luminous flux (lm)	6800
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1
Wattage (W)	54
Product Voltage (V)	230
Dimmable	No
Average life (Nominal) (h)	50000

ToLEDo Performer T85 6800LM 840 E40 SL 0028373


Product EAN number

5410288283739

Warranty

5 years

Photometry

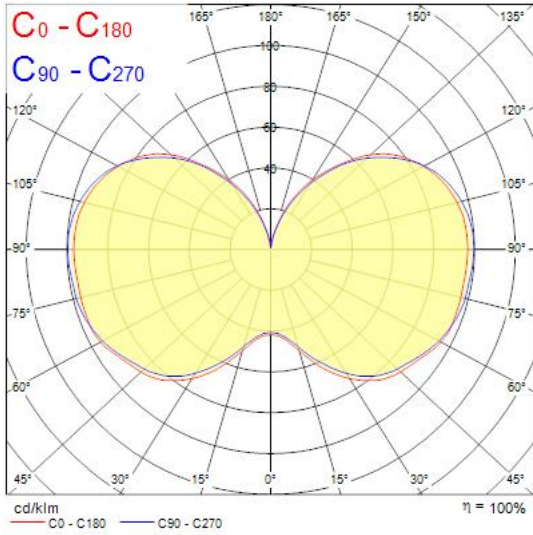

Technical drawings

