



Features

- START Panel IP54 is a range of recessed integrated LED panels for general indoor lighting applications such as breakout areas, offices and meeting rooms. Max. drive current: 165mA; Max. power: 35W; Average lifespan: 100.000Hrs; 4000K; CRI 80; Efficacy up to: 127Lm/W; Fixture lumen up to: 4450lm; Glare control <19; IK03; IP54 (from the front); Class II; DALI dimmable.


Product Overview

| | |
|---------------------------------|--|
| Product name | START PANEL IP54 U19 600 4300LM 840 DALI |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Steel |
| Mount | Ceiling recessed mounting |
| General application | Education, Office |
| ETIM Class | EC002892 |
| E-number FI | 4274205 |
| Fixture luminous flux (lm) | 4300 |
| Luminaire efficacy (lm/W) | 115 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Beam Angle (°) | 90 |
| Glare control | < 19 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 36 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| Dimmable | Yes |

START PANEL IP54 U19 600 4300LM 840 DALI 0047787

| | |
|---------------------------|----------------------------------|
| Minimum dimming level (%) | 1 |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | RAL 9016 - Traffic white / Bezel |
| IP rating | IP54/20 |
| IK rating | IK03 |
| Product EAN number | 5410288477879 |
| Warranty | 5 years |
| Dimming method | DALI |

Photometry

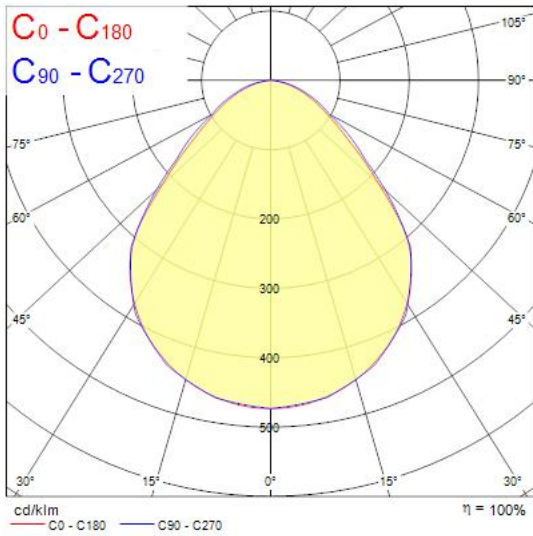

Technical drawings

