

### Features

• OPTICLIP 600 4000K C8 WH CC WHITE is a high efficacy low glare luminaire with replaceable light engines for office and education applications. Ceiling recessed LED luminaire with white colour plastic optic, direct light distribution, luminaire dimensions: 595x595x20mm, Sylvania White body colour (RAL9016), IP40 (from the front), IK07, Constant Current driver, low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 3300lm luminous flux, 26W power consumption, 126lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<17, Luminance at 65° < 2000 cd/m<sup>2</sup>, lifespan: 62,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.


### Product Overview

<b>Product name</b>	OptiClip 600 4000K C8 WH CC WHITE
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>Fixture rating</b>	Enclosed
<b>General application</b>	Education, Office
<b>ETIM Class</b>	EC002892
<b>Fixture luminous flux (lm)</b>	3300
<b>Luminaire efficacy (lm/W)</b>	126
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Beam Angle (°)</b>	80
<b>Glare control</b>	< 17

## OptiClip 600 4000K C8 WH CC WHITE 0044000

Photobiological Risk Group	RG1
Total power consumption (W)	26
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5410288440002
Warranty	5 years
Dimming method	N/A

### Photometry

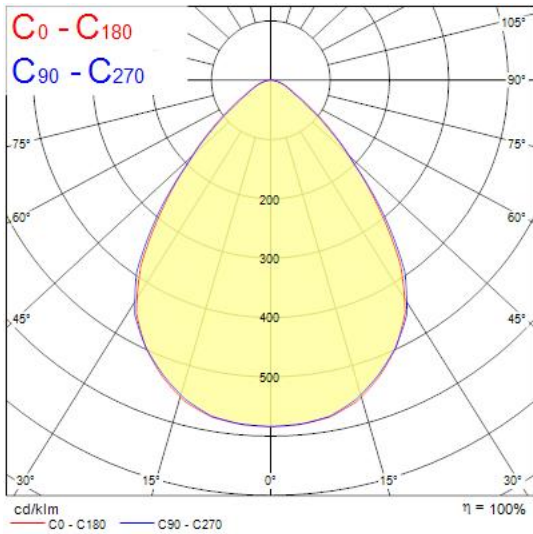

### Technical drawings

