



### Features

- Ceiling recessed IP44 from the front LED downlight, perfect where limited ceiling void is available with only 60mm product depth and 205mm cutout. Ideal replacement for 1x42W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Die-cast aluminium body, 1986LM, 21W, 95lm/W, 3000K, Driver Current: 600mA, CRI80, 74° beam angle, 1-10V dimmable LED driver (TCI 125421), IP44 from the front, IK07, (HxW) 60x205mm, 0.60kg, RAL9003, Class 2, 220-240V,

### Product Overview


|                             |                                 |
|-----------------------------|---------------------------------|
| Product name                | SYL-LIGHTER II 220 21W WW 1-10V |
| Technology                  | LED                             |
| Housing                     | Aluminium                       |
| Mount                       | Ceiling recessed mounting       |
| Fixture rating              | Enclosed                        |
| Environment                 | Interior                        |
| General application         | Hospitality                     |
| ETIM Class                  | EC001744                        |
| E-number FI                 | 4270327                         |
| E-number SE                 | 7470953                         |
| Fixture luminous flux (lm)  | 1986                            |
| Luminaire efficacy (lm/W)   | 95                              |
| LOR (%)                     | 100                             |
| Colour temperature (K)      | 3000                            |
| Light colour                | Warm White                      |
| CRI (Ra)                    | 80                              |
| Colour Consistency (SDCM)   | 5                               |
| Beam Angle (°)              | 74                              |
| Photobiological Risk Group  | RG0                             |
| Total power consumption (W) | 21                              |

# Lumiance

## SYL-LIGHTER II 220 21W WW 1-10V 3031853

|                           |                         |
|---------------------------|-------------------------|
| Electrical protection     | Class II                |
| Control gear type         | Other                   |
| Control gear mounting     | Remote                  |
| Dimmable                  | Yes                     |
| Minimum dimming level (%) | 1                       |
| Housing colour            | RAL 9003 - Signal white |
| IP rating                 | IP44/20                 |
| IK rating                 | IK07                    |
| Product EAN number        | 8711971318538           |
| Warranty                  | 5 years                 |
| Dimming method            | 1-10V (Analogue)        |

### Photometry

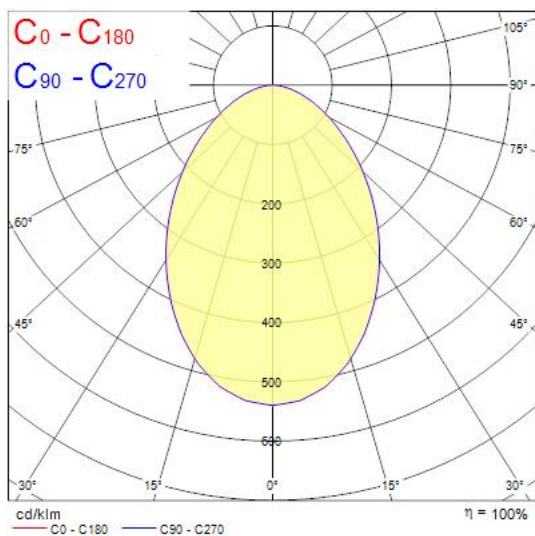

### Technical drawings

