



Features

- The ASCENT 100 II ARCH 1825 3K DALI EMG 120 is a high efficient DALI dimmable downlight luminaire with 3 hour emergency, Colour rendering index Ra >80, Colour temperature: 3000K Warm White, Class II, Protection rating IP65/IK02, Cut out dimensions: 137mm


Product Overview

Product name	ASCENT 100 II ARCH 1825 3K IP65 DALI EMG 120
Technology	LED
Cap/Base	Cable
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	1825
Luminous flux (lm)	1825
Luminaire efficacy (lm/W)	96
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	85
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	19

ASCENT 100 II ARCH 1825 3K IP65 DALI EMG 120 2060661

Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Remote
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP65/20
IK rating	IK02
Product EAN number	5025768606610
Warranty	5 years
Dimming method	DALI, Switch-dim (mains-rated)

Photometry

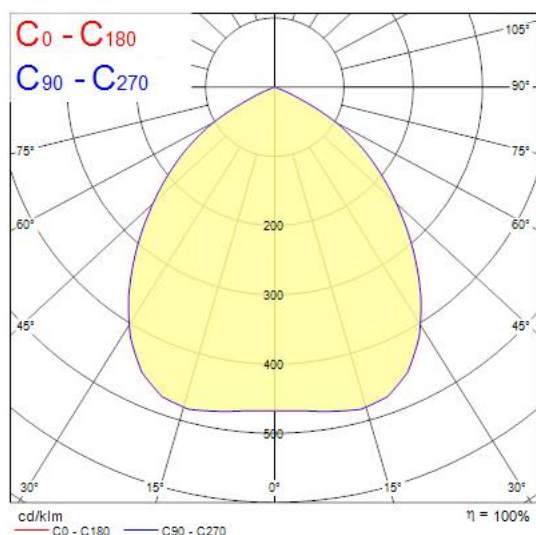

Technical drawings

