



Features

• OPTIX RECESSED 1200x300 2L 4000K WHT DALI is a high efficacy low glare luminaire for office and education applications. Ceiling recessed 1200x300 mm. White plastic low glare optics in 2 lines configuration. White RAL9016 fixture body. DALI dimmable. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3450lm. Power consumption 24W. Luminaire efficacy 144lm/W. Lifespan: 48,500 hours L90B10. UGR<19, Luminance at 65°<3000 Cd/m2, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.


Product Overview

Product name	OPTIX RECESSED 1200x300 2L 4000K WHT DALI
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	3450
Luminous flux (lm)	3450
Luminaire efficacy (lm/W)	144
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	24
Electrical protection	Class I

OPTIX RECESSED 1200x300 2L 4000K WHT DALI 2023677

Control gear type	Other
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Product EAN number	5025768236770
Warranty	5 years
Dimming method	DALI

Photometry

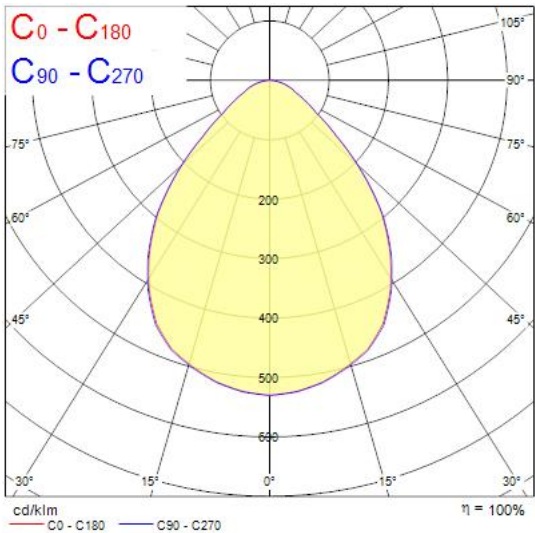

Technical drawings

