



### Features

- START Panel IP54 is a range of recessed integrated LED panels for general indoor lighting applications such as breakout areas, offices and meeting rooms. With the help of DIP Switch multiple lumen outputs can be set up in 8 steps (13W 1625lm, 16W 2025lm, 19W 2450lm, 22W 2850lm, 26W 3350lm, 29W 3700lm, 32W 4100lm, 35W 4450lm). Max. drive current: 165mA; Max. power: 35W; Average lifespan: 100.000Hrs; 4000K; CRI 80; Efficacy up to: 127Lm/W; Fixture lumen up to: 4450lm; Glare control <19; IK03; IP54 (from the front); Class II; Wieland connector included


### Product Overview

<b>Product name</b>	START PANEL IP54 MLTPWR U19 600 4450LM 840 GST18/3
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>General application</b>	Education, Office
<b>ETIM Class</b>	EC002892
<b>Fixture luminous flux (lm)</b>	4450
<b>Luminaire efficacy (lm/W)</b>	127
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Beam Angle (°)</b>	90
<b>Glare control</b>	< 19
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	35
<b>Electrical protection</b>	Class II
<b>Control gear type</b>	Electronic ballast multiwatt

## START PANEL IP54 MLTPWR U19 600 4450LM 840 GST18/3 0047045

Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP54/20
IK rating	IK03
Product EAN number	5410288470450
Warranty	5 years
Dimming method	N/A

### Photometry

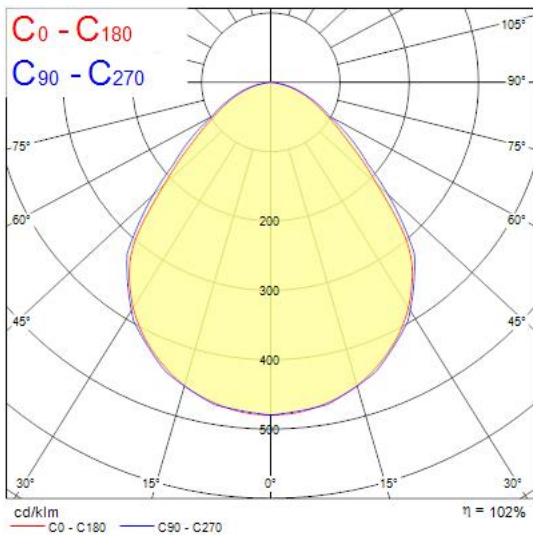

### Technical drawings

