



## Features


- A click diffuser made of acrylic thermoplastic (PMMA). Operating temperature: -20 - 70 [°C]. IK rating: 08. UV resistant. Fire hazard certificate according to IEC 60695-2-11. Compatible with the following profiles: Profile deep wide surface 30 CDE-9/T (0022608), Profile shallow wide surface 30 CDE-9/T (0022609). Transparency level 75%.

## Product Overview

<b>Product name</b>	Cover C9 click 3m opal
<b>Technology</b>	Accessory
<b>Housing</b>	Aluminium
<b>General application</b>	Retail
<b>ETIM Class</b>	EC002557
<b>E-number FI</b>	4278039
<b>Housing colour</b>	Silver
<b>Product EAN number</b>	5410288226248
<b>Warranty</b>	3 years

Cover C9 click 3m opal  
**0022624**

## Technical drawings

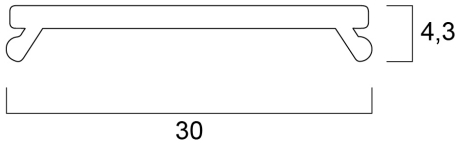

## Data table

### GENERAL DATA

Product name	Cover C9 click 3m opal
Technology	Accessory
Housing	Aluminium
General application	Retail
ETIM Class	EC002557
E-number FI	4278039
Warranty	3 years

### ELECTRICAL DATA

Control gear required	No
-----------------------	----

### PHYSICAL DATA

Housing colour	Silver
Diffuser finish	Opal
Nominal Product Length (mm)	3000

## Cover C9 click 3m opal 0022624

Nominal Product Width (mm)	30
Nominal Product Height (mm)	4.3
Weight (kg)	0.07

### PACKAGING

Single packaging type	Carton
Product EAN number	5410288226248
Packaging single length / height (cm)	300.0
Packaging single width (cm)	3.0
Packaging single depth (cm)	2.0
DUN14 (outer)	05410288226248
Units per outer package	100
Packaging outer length / height (cm)	305.0
Packaging outer width (cm)	16.0
Packaging outer depth (cm)	16.0

### SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No