



Features

- .



Product Overview



Product name	14W/T5/830 FHE
Technology	Fluorescent
Watt (Rated) (W)	14
Lamp shape	Tube, double-ended
Type	T5 FHE Luxline Plus
Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4944203
E-number SE	8356502
E-number Norway	3800900
Luminous flux (lm)	1200
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	87
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	85
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	Not applicable
Wattage (W)	14.00
Product Voltage (V)	82

14W/T5/830 FHE

0002760

Dimmable	Yes
Average life (Nominal) (h)	24000
Product EAN number	5410288027609
Colour Code	830

Technical drawings

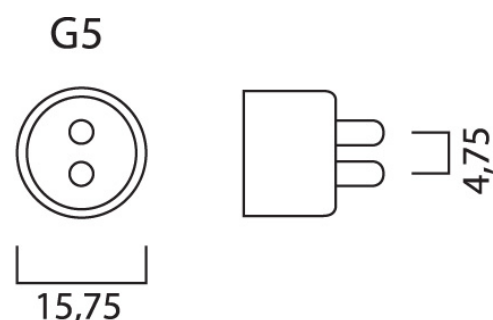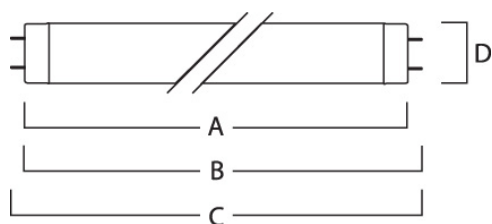

Data table

GENERAL DATA

Product name	14W/T5/830 FHE
Technology	Fluorescent
Watt (Rated) (W)	14
Lamp shape	Tube, double-ended
Type	T5 FHE Luxline Plus
Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4944203
E-number SE	8356502
E-number Norway	3800900

OPTICAL DATA

Luminous flux (lm)	1200
Luminous flux (Rated) (lm)	1200
Luminous flux (Nominal) at 35°C (lm)	1350
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	87
Ambient temperature for maximum luminous flux (°C)	35
Colour temperature (K)	3000
Light colour	Warm White
Colour Code	830
CRI (Ra)	85
Colour Variation Initial (SDCM)	5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	0.97
Rated lumen maint. factor (%) at 4000 h 50Hz	0.95
Rated lumen maint. factor (%) at 6000 h 50Hz	0.93
Rated lumen maint. factor (%) at 8000 h 50Hz	0.92
Rated lumen maint. factor (%) at 12000 h 50Hz	0.91
Rated lumen maint. factor (%) at 16000 h 50Hz	0.90
Rated lumen maint. factor (%) at 20000 h 50Hz	0.88

ELECTRICAL DATA

Wattage (W)	14.00
Watt (Rated) - High frequency (W)	13.80
Current (A)	0.170

14W/T5/830 FHE

0002760

Mains voltage (V)	220-240V
Product Voltage (V)	82
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Drive current (mA)	170
Lamp Energy Label (class)	F
kWh per 1000 hours burning time	16

LIFETIME DATA

Average life (Nominal) (h)	24000
Average life (Rated) (h)	24000
Rated survival factor (%) at 2000 h 50Hz	0.99
Rated survival factor (%) at 4000 h 50Hz	0.98
Rated survival factor (%) at 6000 h 50Hz	0.96
Rated survival factor (%) at 8000 h 50Hz	0.94
Rated survival factor (%) at 12000 h 50Hz	0.93
Rated survival factor (%) at 16000 h 50Hz	0.90
Rated survival factor (%) at 20000 h 50Hz	0.84

PHYSICAL DATA

Nominal Product Length (mm)	550.0
Nominal Product Diameter (mm)	16
Max. Length base to base (mm) - A	549.0
Length base to pin Min-Max (mm) - B	553.7-556.1
Max. Lamp Length (mm) - C/L	563.2
Max. Lamp Diameter (mm) - D	17.0
Weight (kg)	0.043

PACKAGING

Single packaging type	Carton
Product EAN number	5410288027609
Packaging single length / height (cm)	56.4
Packaging single width (cm)	1.9

14W/T5/830 FHE

0002760

Packaging single depth (cm)	1.9
DUN14 (outer)	15410288027606
Units per outer package	25
Packaging outer length / height (cm)	57.8
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	10.5

SAFETY DATA


Lamp mercury content (mg)	2.30
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	Yes

14W/T5/830 FHE
0002760

Energy label



0002760

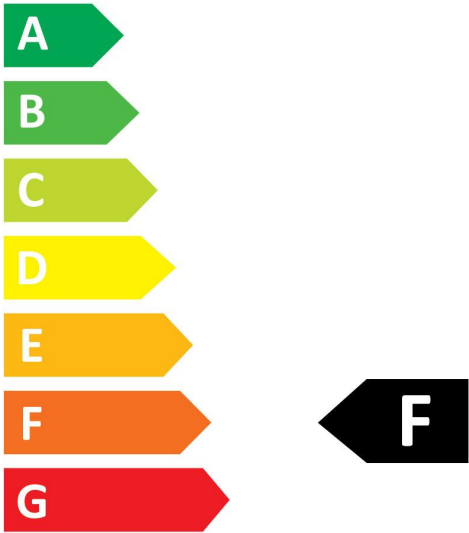


14
kWh/1000h



2019/2015



0002760

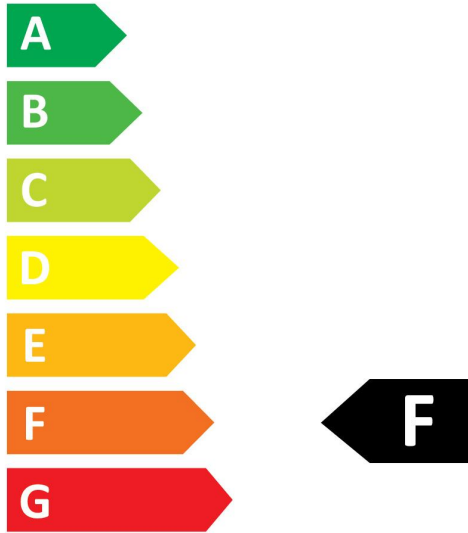

14
kWh/1000h



2019/2015