

### Features

• OPTICLIP 600 3000K C8 WH SSA02 WHITE is a high efficacy low glare luminaire with replaceable light engines for office and education applications. Ceiling recessed LED luminaire with white colour plastic optic, direct light distribution, luminaire dimensions: 595x595x52mm, Sylvania White body colour (RAL9016), IP40 (from the front), IK07, SylSmart Connected capable, low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 3100lm luminous flux, 27W power consumption, 114lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<17, Luminance at 65° < 2000 cd/m<sup>2</sup>, lifespan: 62,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.


### Product Overview

<b>Product name</b>	OptiClip 600 3000K C8 WH SSA02 WHITE
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>Fixture rating</b>	Enclosed
<b>General application</b>	Education, Office
<b>ETIM Class</b>	EC002892
<b>Fixture luminous flux (lm)</b>	3100
<b>Luminaire efficacy (lm/W)</b>	114
<b>Colour temperature (K)</b>	3000
<b>Light colour</b>	Warm White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Beam Angle (°)</b>	80

## OptiClip 600 3000K C8 WH SSA02 WHITE 0044011

Glare control	< 17
Photobiological Risk Group	RG1
Total power consumption (W)	27
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5410288440118
Warranty	5 years
Dimming method	SylSmart SSA

### Photometry

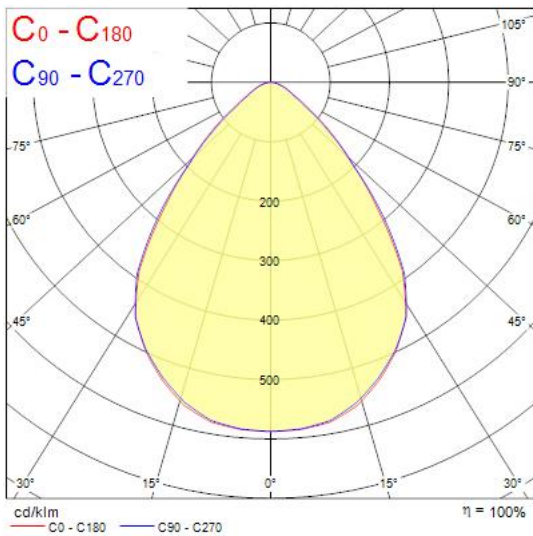

### Technical drawings

