

# Concord

EQUINOX 165 2300 TRIMLESS 930 SSC  
2059938



## Features

- Equinox is an elegant and innovative luminaire designed using the latest optical technology. It is a high quality and efficient lighting solution for office, hospitality, and retail environments. It creates inspirational halo effects regulated by a unique adjustable optic system. It is Sylsmart dimmable downlight luminaire, Colour rendering index Ra >90, Colour temperature: 3000K Warm White, Class II, Cut out dimensions: 165mm. Low Glare UGR<19.

## Product Overview


Product name	EQUINOX 165 2300 TRIMLESS 930 SSC
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Office
ETIM Class	EC001744
Fixture luminous flux (lm)	2300
Luminaire efficacy (lm/W)	115
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	64
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	20

# Concord

## EQUINOX 165 2300 TRIMLESS 930 SSC 2059938

Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Remote
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Product EAN number	5025768599387
Warranty	5 years
Dimming method	SylSmart SSC

### Photometry

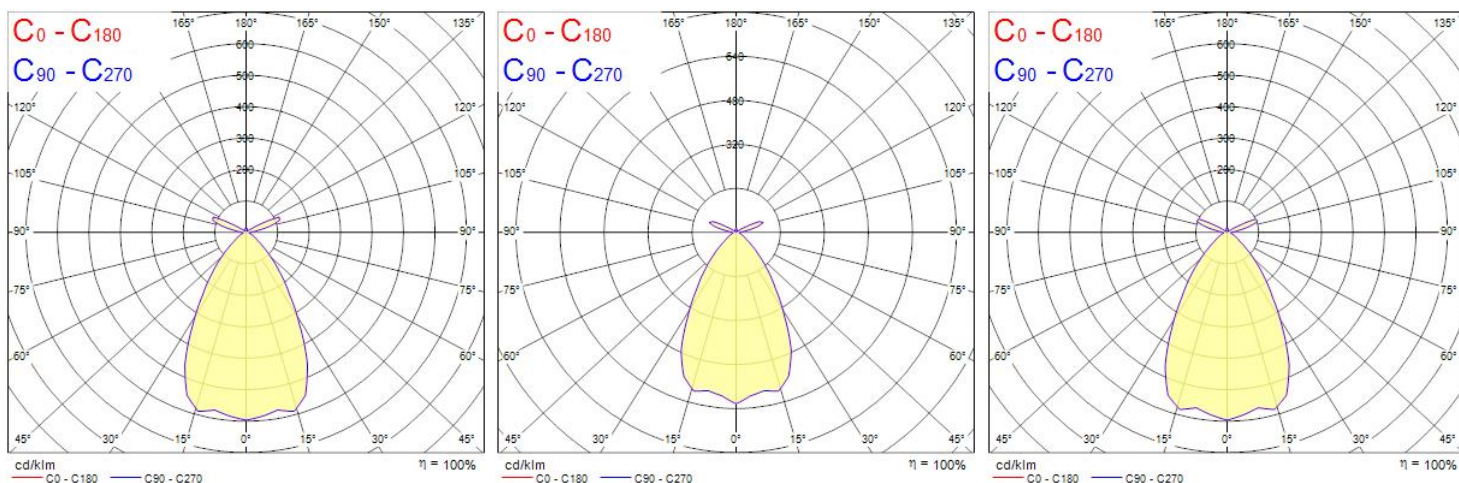

Distance [m]	Cone diameter [m]	E(0°) E(C0)	η
0.5	0.62	5480 1677	31.9°
1.0	1.24	1370 419	31.9°
1.5	1.87	609 186	31.9°
2.0	2.49	342 106	31.9°
2.5	3.11	219 67	31.9°
3.0	3.73	152 47	31.9°

Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 63.8°)

Distance [m]	Cone diameter [m]	E(0°) E(C0)	η
0.5	0.62	5490 1681	32.0°
1.0	1.25	1378 420	32.0°
1.5	1.87	610 187	32.0°
2.0	2.50	343 106	32.0°
2.5	3.12	220 67	32.0°
3.0	3.75	153 47	32.0°

Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 64.0°)


Distance [m]	Cone diameter [m]	E(0°) E(C0)	η
0.5	0.64	1015 305	32.6°
1.0	1.28	254 78	32.6°
1.5	1.92	113 34	32.6°
2.0	2.56	63 19	32.6°
2.5	3.20	41 12	32.6°
3.0	3.84	28 8	32.6°

Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 65.2°)

# Concord

EQUINOX 165 2300 TRIMLESS 930 SSC  
2059938

## Technical drawings

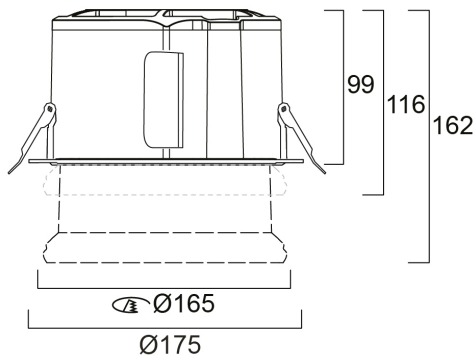

## Data table

### GENERAL DATA

Product name	EQUINOX 165 2300 TRIMLESS 930 SSC
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Office
Operating temperature range (°C)	1°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 years

### OPTICAL DATA

Fixture luminous flux (lm)	2300
----------------------------	------

# Concord

## EQUINOX 165 2300 TRIMLESS 930 SSC 2059938

Luminaire efficacy (lm/W)	115
Colour temperature (K)	3000
Correlated colour temperature range (K)	3000 - 3000
Light colour	Warm White
CRI (Ra)	90
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	64
Distribution type	Diffuse
Glare control	< 19
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Total power consumption (W)	20
Mains voltage (V)	220-240V
Lamp power factor	0.96
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Control gear mounting	Remote
Transformer required	No
Dimmable	Yes
Dimming method	SylSmart SSC
Minimum dimming level (%)	1
Drive current (mA)	650
Drive current - Range (mA)	650mA / 650mA
Inrush Current (A)	26.4
Inrush Duration (µs)	224
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	16

# Concord

## EQUINOX 165 2300 TRIMLESS 930 SSC 2059938

Max. Luminaires per 13A C Breaker	21
Max. Luminaires per 16A C Breaker	26
Max. Luminaires per 20A C Breaker	33
Max. Luminaires per 10A B Breaker	10
Max. Luminaires per 13A B Breaker	13
Max. Luminaires per 16A B Breaker	16
Max. Luminaires per 20A B Breaker	20

### LIFETIME DATA

Lifespan L70 B50	120000
Lifespan L80 B20	114000
Lifespan L80 B10	108000
Lifespan L90 B10	51500

### PHYSICAL DATA

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Diffuser finish	Other
Diffuser material	PMMA Acrylic
Reflector finish	None
Nominal Product Height (mm)	99
Nominal Product Diameter (mm)	175
Cutout Dimensions (W x L in mm or Diameter in mm)	165
Weight (kg)	1.55

### PACKAGING

Single packaging type	Carton
Product EAN number	5025768599387
Packaging single length / height (cm)	20.0
Packaging single width (cm)	25.0
Packaging single depth (cm)	20.0
DUN14 (outer)	05025768599387

# Concord

EQUINOX 165 2300 TRIMLESS 930 SSC  
**2059938**

---

Units per outer package	1
Packaging outer length / height (cm)	20.0
Packaging outer width (cm)	25.0
Packaging outer depth (cm)	20.0

## SAFETY DATA

---

Optimal operating condition (°C)	1-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No